

I815E

Socket 370

Intel 815E Little Board

USER'S MANUAL

Version 1.1

Acknowledgments

Award is a registered trademark of Award Software International, Inc.

PS/2 is a trademark of International Business Machines Corporation.

Intel and Celeron are registered trademarks of Intel Corporation.

Microsoft Windows is a registered trademark of Microsoft Corporation.


Winbond is a registered trademark of Winbond Electronics Corporation.

All other product names or trademarks are properties of their respective owners.

Table of Contents

Introduction.....	1
Product Description	1
Checklist.....	2
Specifications.....	3
Board Dimensions.....	4
Installations	5
Installing the CPU.....	6
Installing the Memory (DIMM)	7
Setting the Jumpers.....	8
Connectors on I815E.....	12
BIOS Setup.....	25
Drivers Installation.....	47
Appendix	75
A. I/O Port Address Map.....	75
B. Interrupt Request Lines (IRQ)	76

A picture of the I815E Embedded Board

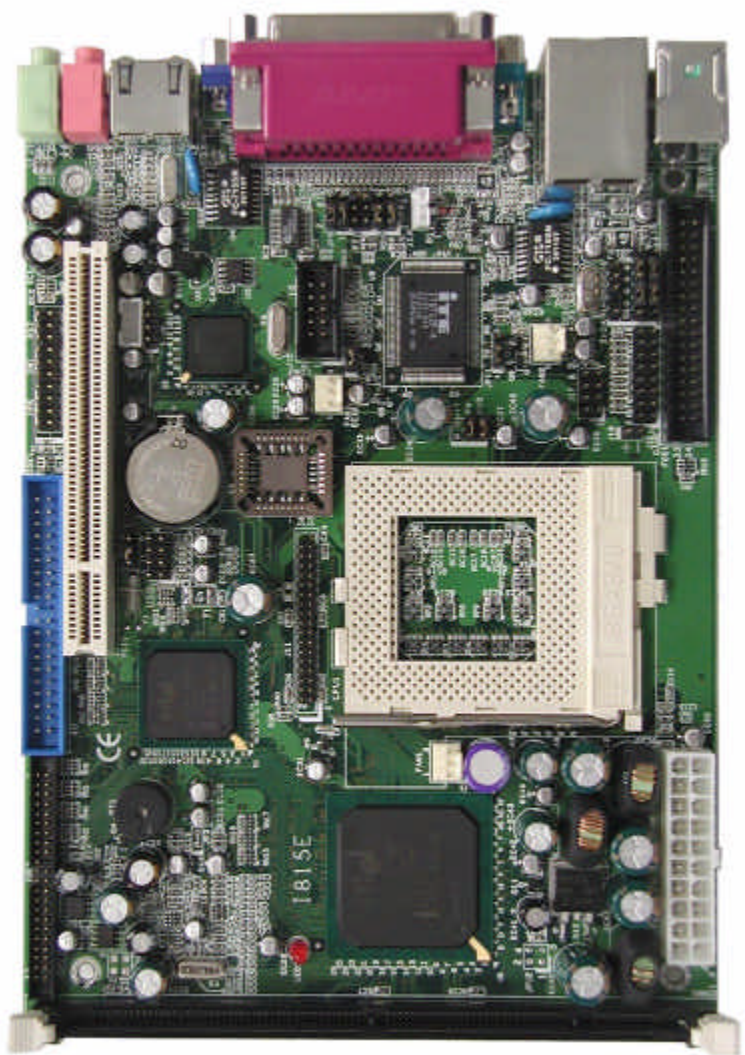

Introduction

Product Description

I815E is a high-performance flexible embedded board based on the Intel 815E chipset that contains the Graphics and Memory Controller Hub (GMCH), the I/O Controller Hub (ICH2) and the Firmware Hub (FWH). It supports 66/100/133MHz system bus, up to 1.4GHz CPU speed, integrated 2D/3D graphics accelerator, and PC100/PC133 SDRAM modules. With the ICH2, it is able to support UDMA33/66/100, four USB ports, and integrated LAN.

System memory is provided by one 168-pin DIMM socket that accommodates SDRAM with a maximum capacity of 256MB. The Award BIOS facilitates easy system configuration and peripheral setup. Other advanced features include four USB ports, 256-level watchdog timer (supported by LPC I/O IT8712), and IrDA interface.

Checklist


Your I815E package should include the items listed below.

- The I815E Embedded Little Board
- This User' s Manual
- 1 IDE Ribbon Cable
- 1 Floppy Ribbon Connector
- 1 CD containing the following:
 - Chipset Drivers
 - Flash Memory Utility

Specifications

Processor Supported	Socket 370 for Intel Celeron / Pentium III (FC-PGA), 533MHz~1.4GHz, 66/100/133MHz Bus Speed
Chipset	Intel 815E Chipset GMCH: 82815 544-PIN BGA ICH2: 82801BA 360-PIN BGA FWH
BIOS	Award BIOS; supports ACPI
System Memory	1x DIMM socket supports up to 256MB capacity PC100/PC133 DIMM modules supported
LPC I/O Chipset	ITE IT8712 (keyboard controller is built-in)
I/O Features	1x FDD (up to 2.88MB, 3 Mode, LS120) 1x Parallel Port (EPP, ECP Port) 2x Serial Ports (1x RS232 and 1x RS232/422/485) 1x IrDA TX/RX Headers
Bus Master IDE	2x IDE interfaces for up to 4 devices; supports PIO Mode 3/4 or UDMA33/66/100 HDD, and ATAPI CD-ROM
VGA	815E integrated graphics Shared memory 4MB display cache on board VGA CRT connector on board Pin header for optional TV-Out (CH7007) daughter board with S-Video & RCA jacks
Audio	ICH2 integrated audio with AC97 codec
LAN	ICH2 integrated Ethernet controller 10Base-T / 100Base-TX protocol Primary RJ-45 Ethernet connector on board
Secondary LAN (Optional)	Optional Intel 82559 Ethernet controller 10Base-T / 100Base-TX protocol Optional Secondary RJ-45 Ethernet connector on board
USB	Two USB ports on board Another two USB ports supported by USB pin header
IrDA	Pin header
Hardware Monitoring	Built-in IT8712 Monitors CPU/system temperature and voltages
Watchdog Timer	256-level Watchdog timer
P/S Connector	ATX type power supply connector
Rear Side Connectors	PS/2 keyboard, PS/2 mouse, Primary RJ45 connector; optional secondary RJ-45 connector, printer port, VGA CRT, USBx2, serial Port, Microphone, speaker
Form Factor	5.25-inch SBC (Little Board)
Dimensions	203mm x 146mm (7.99" x 5.75")

Board Dimensions

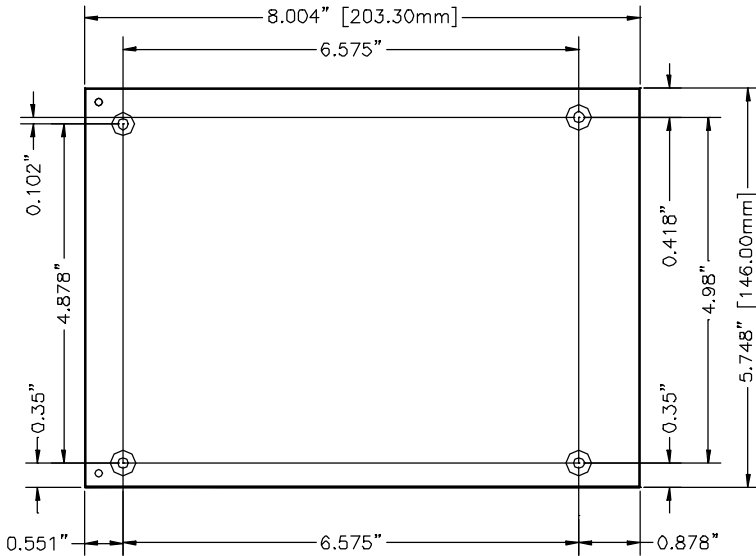

Installations


This section provides information on how to use the jumpers and connectors on the I815E in order to set up a workable system. The topics covered are:

Installing the CPU.....	6
Installing the Memory (DIMM)	7
Setting the Jumpers.....	8
Connectors on I815E.....	12

Installing the CPU

The I815E board supports a Socket 370 processor socket for Intel Pentium III and Celeron processors.

The Socket 370 processor socket comes with a lever to secure the processor. Raise this lever to about a 90° angle to allow the insertion of the processor. Place the processor into the socket by making sure the notch on the corner of the CPU corresponds with the notch on the inside of the socket. Once the processor has slide into the socket, return the lever to the lock position. Refer to the figures below.

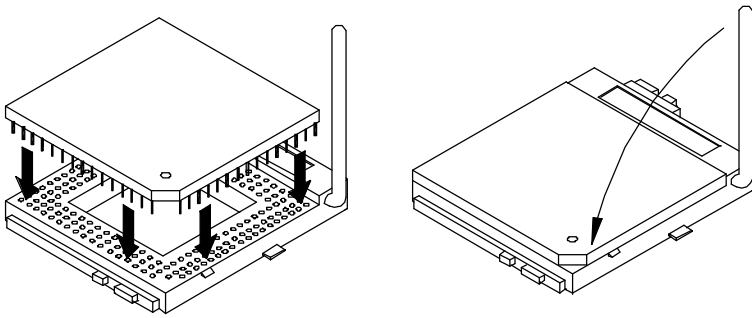

After you have installed the processor into the socket, check if the jumpers for the CPU type and speed are correct.

NOTE: *Ensure that the CPU heat sink and the CPU top surface are in total contact to avoid CPU overheating problem that would cause your system to hang or be unstable.*


Installing the Memory (DIMM)

The I815E board supports one 168-pin DIMM socket for a maximum total memory of 256MB in SDRAM type. The memory module capacities supported are 32MB, 64MB, 128MB and 256MB.

Installing and Removing DIMMs

To install the DIMM, locate the memory slot on the board and perform the following steps:

1. Hold the DIMM so that the two keys of the DIMM align with those on the memory slot.
2. Gently push the DIMM in an upright position until the clips of the slot close to hold the DIMM in place when the DIMM touches the bottom of the slot.
3. To remove the DIMM, press the clips with both hands.

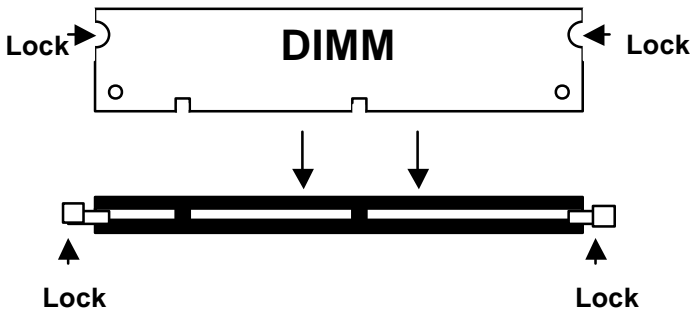


Top View of DIMM Socket

Setting the Jumpers

Jumpers are used on I815E to select various settings and features according to your needs and applications. Contact your supplier if you have doubts about the best configuration for your needs. The following lists the connectors on I815E and their respective functions.

Jumper Locations on I815E.....	9
Configuring the CPU Frequency	10
JP2: Clear CMOS Contents	10
JP5, JP7, JP8: RS232/422/485 (COM2) Selection	10
JP6: BIOS Write Protect	11
JP9, JP10: CPU Overclocking.....	11

Jumper Locations on I815E

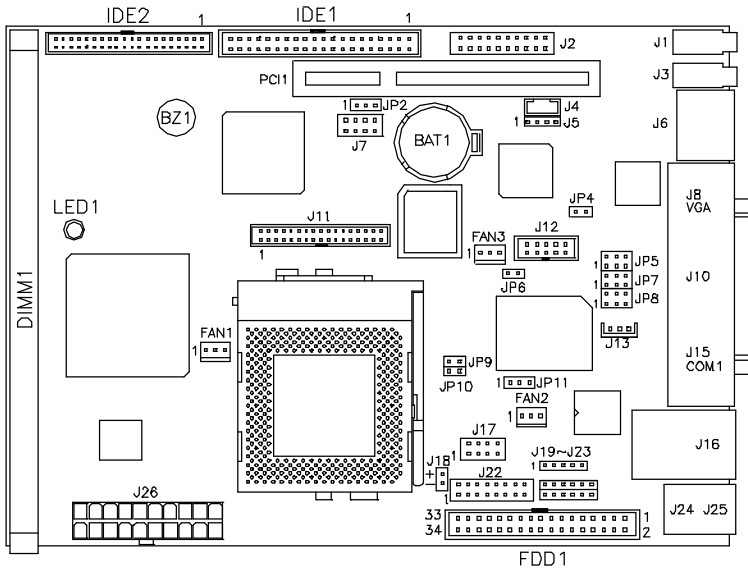

Jumpers:



- JP2: Clear CMOS Contents
- JP5, JP7, JP8: RS232/422/485 (COM2) Selection
- JP6: BIOS Write Protect
- JP9, JP10: CPU Overclocking

Configuring the CPU Frequency

The I815E board does not provide DIP switches to configure the processor speed (CPU frequency). However, the processor speed can be configured inside the BIOS Setup. Refer to the BIOS Setup section in this manual on how to change the processor speed.

JP2: Clear CMOS Contents

Use JP2, a 3-pin header, to clear the CMOS contents. *Note that the ATX-power connector should be disconnected from the board before clearing CMOS.*

JP2	Setting	Function
 Pin 1-2 Short/Closed	Normal	
 Pin 2-3 Short/Closed	Clear CMOS	


JP5, JP7, JP8: RS232/422/485 (COM2) Selection

COM1 is fixed for RS-232 use only.

COM2 is selectable for RS232, RS-422 and RS-485.



The following table describes the jumper settings for COM2 selection.

COM2 Function	RS-232	RS-422	RS-485
Jumper Setting (pin closed)	JP7: 1-2	JP7: 3-4	JP7: 5-6
	JP5: 3-5 & 4-6	JP5: 1-3 & 2-4	JP5: 1-3 & 2-4
	JP8: 3-5 & 4-6	JP8: 1-3 & 2-4	JP8: 1-3 & 2-4









JP6: BIOS Write Protect

JP6 can be used to protect the BIOS from being overwritten due to accidental modification or virus attacks.

JP6	Write Protect
 SHORT	Disabled
 OPEN	Enabled

JP9, JP10: CPU Overclocking

Use JP9 and JP10 2-pin jumpers when overclocking the CPU bus speed from 66MHz to 100MHz or 100MHz to 133MHz. Refer to the table below. Note that some processors cannot be overclocked because their bus speed has been ‘locked’ by the manufacturer and overclocking can cause the system to hang or become unstable.


Jumper	Normal	66 → 100MHz	100 → 133MHz
JP9	 SHORT	 SHORT	 OPEN
JP10	 SHORT	 OPEN	 SHORT

Connectors on I815E

The connectors on I815E allows you to connect external devices such as keyboard, floppy disk drives, hard disk drives, printers, etc. The following table lists the connectors on I815E and their respective functions.

Connector Locations on I815E.....	13
IDE1, IDE2: Primary and Secondary IDE Connectors	14
FDD1: Floppy Drive Connector	15
J2: System Function Connector	15
FAN1: CPU Fan Power Connector	17
FAN2, FAN3: System Fan Power Connectors	18
J1, J3: Line-out and Microphone connectors	18
J4, J5: CD In Connectors	18
J6: Secondary RJ45 Connector (optional)	18
J7: USB3/USB4 Connector	19
J8: VGA CRT Connector	19
J10: Parallel Port Connector.....	20
J11: TV-Out Interface Connector.....	20
J13: Wake On LAN Connector.....	20
J15, J12: COM1 / COM2 Serial Ports	21
J16: USB and Primary RJ45 Connectors	22
J17: Smart Card Reader Interface	22
J18: +5V Standby Connector	22
J19: IrDA Connector	23
J21: External Keyboard Connector.....	23
J22: Game Port Connector.....	23
J23: External PS/2 Mouse Connector	23
J24, J25: PS/2 Mouse and PS/2 Keyboard Connectors.....	24
J26: ATX Power Supply Connector	24


Connector Locations on I815E

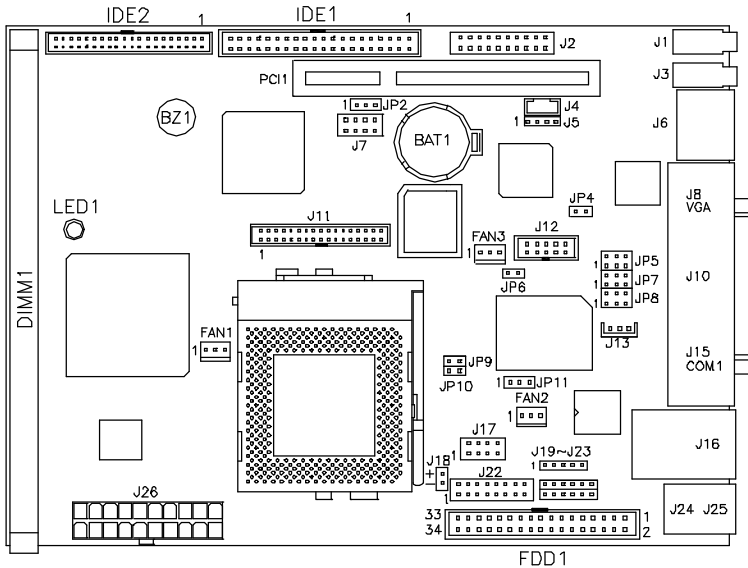


Connectors:

- IDE1, IDE2: Primary and Secondary IDE Connectors
- FDD1: Floppy Drive Connector
- J2: System Function Connector
- FAN1: CPU Fan Power Connector
- FAN2, FAN3: System Fan Power Connectors
- J1, J3: Line-out and Microphone connectors
- J4, J5: CD In Connectors
- J6: Secondary RJ45 Connector (optional)
- J7: USB3/USB4 Connector
- J8: VGA CRT Connector
- J10: Parallel Port Connector
- J11: TV-Out Interface Connector
- J13: Wake On LAN Connector
- J15, J12: COM1 / COM2 Serial Ports
- J16: USB and Primary RJ45 Connectors
- J17: Smart Card Reader Interface
- J18: +5V Standby Connector
- J19: IrDA Connector
- J21: External Keyboard Connector
- J22: Game Port Connector
- J23: External PS/2 Mouse Connector
- J24, J25: PS/2 Mouse and PS/2 Keyboard Connectors
- J26: ATX Power Supply Connector

IDE1, IDE2: Primary and Secondary IDE Connectors




Signal Name	Pin #	Pin #	Signal Name
Reset IDE	1	2	Ground
Host data 7	3	4	Host data 8
Host data 6	5	6	Host data 9
Host data 5	7	8	Host data 10
Host data 4	9	10	Host data 11
Host data 3	11	12	Host data 12
Host data 2	13	14	Host data 13
Host data 1	15	16	Host data 14
Host data 0	17	18	Host data 15
Ground	19	20	Protect pin
DRQ0	21	22	Ground
Host IOW	23	24	Ground
Host IOR	25	26	Ground
IOCHRDY	27	28	Host ALE
DACK0	29	30	Ground
IRQ14	31	32	No connect
Address 1	33	34	No connect
Address 0	35	36	Address 2
Chip select 0	37	38	Chip select 1
Activity	39	40	Ground



Signal Name	Pin #	Pin #	Signal Name
Reset IDE	1	2	Ground
Host data 7	3	4	Host data 8
Host data 6	5	6	Host data 9
Host data 5	7	8	Host data 10
Host data 4	9	10	Host data 11
Host data 3	11	12	Host data 12
Host data 2	13	14	Host data 13
Host data 1	15	16	Host data 14
Host data 0	17	18	Host data 15
Ground	19	20	Key
DRQ0	21	22	Ground
Host IOW	23	24	Ground
Host IOR	25	26	Ground
IOCHRDY	27	28	Host ALE
DACK0	29	30	Ground
IRQ14	31	32	No connect
Address 1	33	34	No connect
Address 0	35	36	Address 2
Chip select 0	37	38	Chip select 1
Activity	39	40	Ground
Vcc	41	42	Vcc
Ground	43	44	N.C.

FDD1: Floppy Drive Connector


FDD1 is a 34-pin header and will support up to 2.88MB floppy drives.



Signal Name	Pin #	Pin #	Signal Name
Ground	1	2	RM/LC
Ground	3	4	No connect
Ground	5	6	No connect
Ground	7	8	Index
Ground	9	10	Motor enable 0
Ground	11	12	Drive select 1
Ground	13	14	Drive select 0
Ground	15	16	Motor enable 1
Ground	17	18	Direction
Ground	19	20	Step
Ground	21	22	Write data
Ground	23	24	Write gate
Ground	25	26	Track 00
Ground	27	28	Write protect
Ground	29	30	Read data
Ground	31	32	Side 1 select
Ground	33	34	Diskette change

J2: System Function Connector

J2 provides connectors for system indicators that provide light indication of the computer activities and switches to change the computer status. J2 is a 20-pin header that provides interfaces for the following functions.

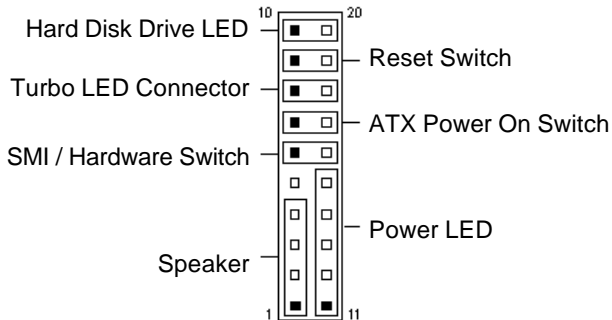

Speaker: Pins 1 - 4

This connector provides an interface to a speaker for audio tone generation. An 8-ohm speaker is recommended.



Pin #	Signal Name
1	Speaker out
2	No connect
3	Ground
4	+5V

Power LED: Pins 11 - 15


The power LED indicates the status of the main power switch.



Pin #	Signal Name
11	Power LED
12	No connect
13	Ground
14	No connect
15	Ground

SMI/Hardware Switch: Pins 6 and 16

This connector supports the "Green Switch" on the control panel, which, when pressed, will force the system into the power-saving mode immediately.



Pin #	Signal Name
6	Sleep
16	Ground


ATX Power ON Switch: Pins 7 and 17

This 2-pin connector is an "ATX Power Supply On/Off Switch" on the system that connects to the power switch on the case. When pressed, the power switch will force the system to power on. When pressed again, it will force the system to power off.



Turbo LED Connector: Pins 8 and 18


There is no turbo/deturbo function on the board. The Turbo LED on the control panel will always be On when attached to this connector.



Pin #	Signal Name
8	5V
18	Ground


Reset Switch: Pins 9 and 19

The reset switch allows the user to reset the system without turning the main power switch off and then on again. Orientation is not required when making a connection to this header.



Hard Disk Drive LED Connector: Pins 10 and 20


This connector connects to the hard drive activity LED on control panel. This LED will flash when the HDD is being accessed.



Pin #	Signal Name
10	Ground
20	5V

FAN1: CPU Fan Power Connector


FAN1 is a 3-pin header for the CPU fan. The fan must be a 12V fan.



Pin #	Signal Name
1	Ground
2	+12V
3	Rotation detection

FAN2, FAN3: System Fan Power Connectors

FAN2 and FAN3 are 3-pin headers for the system fans. The fans must support 12V.




Pin #	Signal Name
1	Ground
2	+12V
3	Rotation detection

J1, J3: Line-out and Microphone connectors


J1 ad J3 are connectors for Line out and Microphone jacks.

J4, J5: CD In Connectors

J4 and J5 are the CD-in connectors. Below is their pin out assignments.



J4




J5

Signal Name	Pin #	Pin #	Signal Name
Ground	1	1	Right
Left	2	2	Ground
Ground	3	3	Ground
Right	4	4	Left

J6: Secondary RJ45 Connector (optional)

J6 is the secondary RJ-45 Ethernet connector, supporting the optional 82559 Ethernet controller, located between the Microphone connector and VGA CRT connector. Refer to the section below for its pin assignments.



J7: USB3/USB4 Connector


J7 is the onboard USB pin-header that supports an optional USB connector cable with two ports for USB3 and USB4.



Pin #		Signal Name
1	8	Vcc
2	7	USB-
3	6	USB+
4	5	Ground

J8: VGA CRT Connector


J8 is a DB-15 VGA connector located beside the COM1 port. The following table shows the pin-out assignments of this connector.



Signal Name	Pin #	Pin #	Signal Name
Red	1	2	Green
Blue	3	4	N.C.
GND	5	6	GND
GND	7	8	GND
N.C.	9	10	GND
N.C.	11	12	N.C.
HSYNC	13	14	VSYNC
NC	15		

J10: Parallel Port Connector

J10 is a DB-25 external connector situated on top of the VGA and serial ports. The following table describes the pin-out assignments of this connector.




Signal Name	Pin #	Pin #	Signal Name
Line printer strobe	1	14	AutoFeed
PD0, parallel data 0	2	15	Error
PD1, parallel data 1	3	16	Initialize
PD2, parallel data 2	4	17	Select
PD3, parallel data 3	5	18	Ground
PD4, parallel data 4	6	19	Ground
PD5, parallel data 5	7	20	Ground
PD6, parallel data 6	8	21	Ground
PD7, parallel data 7	9	22	Ground
ACK, acknowledge	10	23	Ground
Busy	11	24	Ground
Paper empty	12	25	Ground
Select	13	N/A	N/A

J11: TV-Out Interface Connector

The J11 34-pin header is used to connect, through the use of a ribbon cable, to the 34-pin header of an optional daughter card (IBD742) containing the S-VHS and RCA connectors.

J13: Wake On LAN Connector


J13 is a 3-pin header for the Wake On LAN function on the board. The following table shows the pin out assignments of this connector. Wake On LAN will function properly only with an ATX power supply with 5VSB that has 200mA.



Pin #	Signal Name
1	+5VSB
2	Ground
3	-PME

J15, J12: COM1 / COM2 Serial Ports

J15 (COM1) is a DB-9 connector, while J12 (COM2) is a 10-pin header. Refer to the table below for their pin assignments.

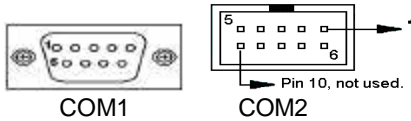


Signal Name	Pin #	Pin #	Signal Name
DCD, Data carrier detect	1	6	DSR, Data set ready
RXD, Receive data	2	7	RTS, Request to send
TXD, Transmit data	3	8	CTS, Clear to send
DTR, Data terminal ready	4	9	RI, Ring indicator
Ground	5	10	Not Used

J12 (COM2) is jumper selectable for RS-232, RS-422 and RS-485.

Pin #	Signal Name		
	RS-232	R2-422	RS-485
1	DCD	TX-	DATA-
2	RX	TX+	DATA+
3	TX	RX+	NC
4	DTR	RX-	NC
5	Ground	Ground	Ground
6	DSR	RTS-	NC
7	RTS	RTS+	NC
8	CTS	CTS+	NC
9	RI	CTS-	NC
10	NC	NC	NC


J16: USB and Primary RJ45 Connectors

J16 consists of the primary RJ-45 connector (top) and two stacked USB ports. Refer to the section below for their respective pin assignments.

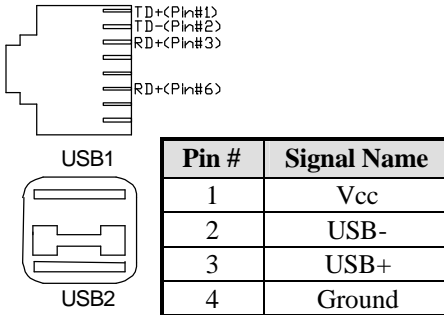


J17: Smart Card Reader Interface

J17 is a 14-pin header that provides interface for a Smart Card Reader. The table below shows the pin assignments of this pin header.

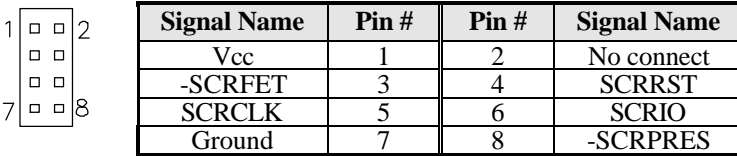


J18: +5V Standby Connector

J18 is the +5V standby 2-pin connector. Refer to the pin assignments below.




J19: IrDA Connector

J19 is used for an optional IrDA connector for wireless communication.



Pin #	Signal Name
1	+5V
2	No connect
3	Ir RX
4	Ground
5	Ir TX


J21: External Keyboard Connector



Signal Name	Pin #	Pin #	Signal Name
Vcc	1	4	KBCLK_OUT
KBDAT_OUT	2	5	KBCLK_IN
KBDAT_IN	3	6	GND


J22: Game Port Connector

J22 is a 16-pin game port pin header for devices such as joysticks.




Signal Name	Pin #	Pin #	Signal Name
VCC	1	9	Vcc
JOY3	2	10	JOY7
JOY1	3	11	JOY5
Ground	4	12	Midi-Out
Ground	5	13	JOY6
JOY2	6	14	JOY8
JOY4	7	15	Midi-In
Vcc	8	16	No connect

J23: External PS/2 Mouse Connector



Signal Name	Pin #	Pin #	Signal Name
Vcc	1	4	MSCLK_OUT
MSDAT_OUT	2	5	MSCLK_IN
MSDAT_IN	3	6	GND

J24, J25: PS/2 Mouse and PS/2 Keyboard Connectors




PS/2 Mouse

PS/2 Keyboard

Signal Name	Keyboard	Mouse	Signal Name
Keyboard data	1	1	Mouse data
N.C.	2	2	N.C.
GND	3	3	GND
5V	4	4	5V
Keyboard clock	5	5	Mouse clock
N.C.	6	6	N.C.

J26: ATX Power Supply Connector

J26 is a 20-pin ATX power supply connector. Refer to the following table for the pin out assignments.



Signal Name	Pin #	Pin #	Signal Name
3.3V	11	1	3.3V
-12V	12	2	3.3V
Ground	13	3	Ground
PS-ON	14	4	+5V
Ground	15	5	Ground
Ground	16	6	+5V
Ground	17	7	Ground
-5V	18	8	Power good
+5V	19	9	5VSB
+5V	20	10	+12V

BIOS Setup

This chapter describes the different settings available in the Award BIOS that comes with the board. The topics covered in this chapter are as follows:

BIOS Introduction	26
BIOS Setup.....	26
Standard CMOS Setup.....	28
Advanced BIOS Features.....	31
Advanced Chipset Features	34
Integrated Peripherals	36
Power Management Setup.....	39
PNP/PCI Configurations.....	42
PC Health Status.....	43
Frequency/Voltage Control.....	44
Load Fail-Safe Defaults	45
Load Setup Defaults	45
Set Supervisor/User Password.....	45
Save & Exit Setup.....	45
Exit Without Saving	45

BIOS Introduction

The Award BIOS (Basic Input/Output System) installed in your computer system's ROM supports Intel Pentium II/III processors. The BIOS provides critical low-level support for a standard device such as disk drives, serial ports and parallel ports. It also adds virus and password protection as well as special support for detailed fine-tuning of the chipset controlling the entire system.

BIOS Setup

The Award BIOS provides a Setup utility program for specifying the system configurations and settings. The BIOS ROM of the system stores the Setup utility. When you turn on the computer, the Award BIOS is immediately activated. Pressing the key immediately allows you to enter the Setup utility. If you are a little bit late pressing the key, POST (Power On Self Test) will continue with its test routines, thus preventing you from invoking the Setup. If you still wish to enter Setup, restart the system by pressing the "Reset" button or simultaneously pressing the <Ctrl>, <Alt> and <Delete> keys. You can also restart by turning the system Off and back On again. The following message will appear on the screen:

```
Press <DEL> to Enter Setup
```

In general, you press the arrow keys to highlight items, <Enter> to select, the <PgUp> and <PgDn> keys to change entries, <F1> for help and <Esc> to quit.

When you enter the Setup utility, the Main Menu screen will appear on the screen. The Main Menu allows you to select from various setup functions and exit choices.

CMOS Setup Utility – Copyright ©1984-2001 Award Software

Standard CMOS Features	Frequency/Voltage Control
Advanced BIOS Features	Load Fail-Safe Defaults
Advanced Chipset Features	Load Optimized Defaults
Integrated Peripherals	Set Supervisor Password
Power Management Setup	Set User Password
PnP/PCI Configurations	Save & Exit Setup
PC Health Status	Exit Without Saving
ESC : Quit	↑ ↓ → ← : Select Item
F10 : Save & Exit Setup	
Time, Date, Hard Disk Type...	

The section below the setup items of the Main Menu displays the control keys for this menu. At the bottom of the Main Menu just below the control keys section, there is another section which displays information on the currently highlighted item in the list.

Note: *If the system cannot boot after making and saving system changes with Setup, the Award BIOS supports an override to the CMOS settings that resets your system to its default.*

Warning: *It is strongly recommended that you avoid making any changes to the chipset defaults. These defaults have been carefully chosen by both Award and your system manufacturer to provide the absolute maximum performance and reliability. Changing the defaults could cause the system to become unstable and crash in some cases.*

Standard CMOS Setup

“Standard CMOS Setup” choice allows you to record some basic hardware configurations in your computer system and set the system clock and error handling. If the board is already installed in a working system, you will not need to select this option. You will need to run the Standard CMOS option, however, if you change your system hardware configurations, the onboard battery fails, or the configuration stored in the CMOS memory was lost or damaged.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
Standard CMOS Features

Date (mm:dd:yy)	Tue, Mar 26 2001	Item Help
Time (hh:mm:ss)	00 : 00 : 00	Menu Level
IDE Primary Master	Press Enter 13020 MB	Change the day, month, Year and century
IDE Primary Slave	Press Enter None	
IDE Secondary Master	Press Enter None	
IDE Secondary Slave	Press Enter None	
Drive A	1.44M, 3.5 in.	
Drive B	None	
Video	EGA/VGA	
Halt On	All, But Keyboard	
Base Memory	640K	
Extended Memory	129024K	
Total Memory	130048K	

At the bottom of the menu are the control keys for use on this menu. If you need any help in each item field, you can press the <F1> key. It will display the relevant information to help you. The memory display at the lower right-hand side of the menu is read-only. It will adjust automatically according to the memory changed. The following describes each item of this menu.

Date

The date format is:

- Day :** Sun to Sat
- Month :** 1 to 12
- Date :** 1 to 31
- Year :** 1994 to 2079

To set the date, highlight the “Date” field and use the PageUp/ PageDown or +/- keys to set the current time.

Time

The time format is: **Hour : 00 to 23**
Minute : 00 to 59
Second : 00 to 59

To set the time, highlight the “Time” field and use the <PgUp>/ <PgDn> or +/- keys to set the current time.

IDE Primary HDDs / IDE Secondary HDDs

The onboard PCI IDE connectors provide Primary and Secondary channels for connecting up to four IDE hard disks or other IDE devices. Each channel can support up to two hard disks; the first is the “Master” and the second is the “Slave”.

Press <Enter> to configure the hard disk. The selections include Auto, Manual, and None. Select ‘Manual’ to define the drive information manually. You will be asked to enter the following items.

CYLS : Number of cylinders
HEAD : Number of read/write heads
PRECOMP : Write precompensation
LANDZ : Landing zone
SECTOR : Number of sectors

The Access Mode selections are as follows:

Auto
Normal (HD < 528MB)
Large (for MS-DOS only)
LBA (HD > 528MB and supports
Logical Block Addressing)

Drive A / Drive B

These fields identify the types of floppy disk drive A or drive B that has been installed in the computer. The available specifications are:

360KB	1.2MB	720KB	1.44MB	2.88MB
5.25 in.	5.25 in.	3.5 in.	3.5 in.	3.5 in.

Video

This field selects the type of video display card installed in your system. You can choose the following video display cards:

EGA/VGA	For EGA, VGA, SEGA, SVGA or PGA monitor adapters. (default)
CGA 40	Power up in 40 column mode.
CGA 80	Power up in 80 column mode.
MONO	For Hercules or MDA adapters.

Halt On

This field determines whether or not the system will halt if an error is detected during power up.

No errors	The system boot will not be halted for any error that may be detected.
All errors	Whenever the BIOS detects a non-fatal error, the system will stop and you will be prompted.
All, But Keyboard	The system boot will not be halted for a keyboard error; it will stop for all other errors.
All, But Diskette	The system boot will not be halted for a disk error; it will stop for all other errors.
All, But Disk/Key	The system boot will not be halted for a keyboard or disk error; it will stop for all others.

Advanced BIOS Features

This section allows you to configure and improve your system and allows you to set up some system features according to your preference.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
Advanced BIOS Features

		ITEM HELP
Virus Warning	Disabled	Menu Level
CPU Internal Cache	Enabled	
External Cache	Enabled	
CPU L2 Cache ECC Checking	Enabled	
Processor Number Feature	Enabled	
Quick Power On Self Test	Enabled	
First Boot Device	Floppy	
Second Boot Device	HDD-0	
Third Boot Device	CDROM	
Boot Other Device	Enabled	
Swap Floppy Drive	Disabled	
Boot Up Floppy Seek	Disabled	
Boot Up Numlock Status	On	
Gate A20 Option	Fast	
Typematic Rate Setting	Disabled	
Typematic Rate (chars/Sec)	6	
Typematic Delay (Msec)	250	
Security Option	Setup	
OS Select For DRAM>64MB	Non-OS2	
Report No FDD For WIN 95	No	
Small Logo (EPA) Show	Enabled	
		Allows you choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep

Virus Warning

This item protects the boot sector and partition table of your hard disk against accidental modifications. If an attempt is made, the BIOS will halt the system and display a warning message. If this occurs, you can either allow the operation to continue or run an anti-virus program to locate and remove the problem.

CPU Internal Cache / External Cache

Cache memory is additional memory that is much faster than conventional DRAM (system memory). CPUs from 486-type on up contain internal cache memory, and most, but not all, modern PCs have additional (external) cache memory. When the CPU requests data, the system transfers the requested data from the main DRAM into cache memory, for even faster access by the CPU. These items allow you to enable (speed up memory access) or disable the cache function. By default, these items are **Enabled**.

CPU L2 Cache ECC Checking

This field enables or disables the ECC (Error Correction Checking) checking of the CPU level-2 cache. The default setting is *Enabled*.

Processor Number Feature

When enabled, this feature allows external systems to detect the processor number/type of the CPU.

Quick Power On Self Test

When enabled, this field speeds up the Power On Self Test (POST) after the system is turned on. If it is set to *Enabled*, BIOS will skip some items.

First/Second/Third Boot Device

These fields determine the drive that the system searches first for an operating system. The options available include *Floppy*, *LS/ZIP*, *HDD-0*, *SCSI*, *CDROM*, *HDD-1*, *HDD-2*, *HDD-3*, *LAN* and *Disable*.

Boot Other Device

These fields allow the system to search for an operating system from other devices other than the ones selected in the First/Second/Third Boot Device.

Swap Floppy Drive

This item allows you to determine whether or not to enable Swap Floppy Drive. When enabled, the BIOS swaps floppy drive assignments so that Drive A becomes Drive B, and Drive B becomes Drive A. By default, this field is set to *Disabled*.

Boot Up Floppy Seek

When enabled, the BIOS will seek whether or not the floppy drive installed has 40 or 80 tracks. 360K type has 40 tracks while 760K, 1.2M and 1.44M all have 80 tracks.

Boot Up NumLock Status

This allows you to activate the NumLock function after you power up the system.

Gate A20 Option

This field allows you to select how Gate A20 is worked. Gate A20 is a device used to address memory above 1 MB.

Typematic Rate Setting

When disabled, continually holding down a key on your keyboard will generate only one instance. When enabled, you can set the two typematic controls listed next. By default, this field is set to *Disabled*.

Typematic Rate (Chars/Sec)

When the typematic rate is enabled, the system registers repeated keystrokes speeds. Settings are from 6 to 30 characters per second.

Typematic Delay (Msec)

When the typematic rate is enabled, this item allows you to set the time interval for displaying the first and second characters. By default, this item is set to *250msec*.

Security Option

This field allows you to limit access to the System and Setup. The default value is *Setup*. When you select *System*, the system prompts for the User Password every time you boot up. When you select *Setup*, the system always boots up and prompts for the Supervisor Password only when the Setup utility is called up.

OS Select for DRAM > 64MB

This option allows the system to access greater than 64MB of DRAM memory when used with OS/2 that depends on certain BIOS calls to access memory. The default setting is *Non-OS/2*.

Small Logo (EPA) Show

This field enables the showing of the EPA logo located at the upper right of the screen during boot up.

Advanced Chipset Features

This Setup menu controls the configuration of the chipset.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
Advanced Chipset Features

SDRAM CAS Latency Time	3	ITEM HELP
SDRAM Cycle Time Tras/Trc	Auto	Menu Level
SDRAM RAS-to-CAS Delay	Auto	
SDRAM RAS Precharge Time	Auto	
System BIOS Cacheable	Disabled	
Video BIOS Cacheable	Disabled	
CPU Latency Timer	Enabled	
Delayed Transaction	Enabled	
AGP Graphics Aperture Size	64MB	
System Memory Frequency	100Mhz	
On-Chip Video Window Size	64MB	

SDRAM CAS Latency Time

You can select CAS latency time in HCLKs of 2/2 or 3/3. The system board designer should set the values in this field, depending on the DRAM installed. Do not change the values in this field unless you change specifications of the installed DRAM or the installed CPU. The choices are 2 and 3.

SDRAM Cycle Time Tras/Trc

The default setting for the SDRAM Cycle Time Tras/Trc is *Auto*.

SDRAM RAS-to-CAS Delay

You can select RAS to CAS Delay time in HCLKs of 2/2 or 3/3. The system board designer should set the values in this field, depending on the DRAM installed. Do not change the values in this field unless you change specifications of the installed DRAM or the installed CPU. The choices are *Auto*, 2 and 3.

SDRAM RAS Precharge Time

This option defines the length of time for Row Address Strobe is allowed to precharge. The choices are *Auto*, 2 and 3.

System BIOS Cacheable

The setting of *Enabled* allows caching of the system BIOS ROM at F000h-FFFFh, resulting in better system performance. However, if any program writes to this memory area, a system error may result.

Video BIOS Cacheable

The Setting *Enabled* allows caching of the video BIOS ROM at C0000h-F7FFFh, resulting in better video performance. However, if any program writes to this memory area, a system error may result.

CPU Latency Timer

The default setting for the CPU Latency Timer is *Enabled*.

Delayed Transaction

The chipset has an embedded 32-bit posted write buffer to support delay transactions cycles. Select *Enabled* to support compliance with PCI specification version 2.1.

AGP Aperture Size

The field sets aperture size of the graphics. The aperture is a portion of the PCI memory address range dedicated for graphics memory address space. Host cycles that hit the aperture range are forwarded to the AGP without any translation. The default setting is *64M*.

System Memory Frequency

This field sets the frequency of the memory installed in the board. The default setting is *100MHz*.

On-Chip Video Window Size

The setting choices for the On-Chip Video Window Size are *64MB* and *32MB*. By default, this option is set to *64MB*.

Integrated Peripherals

This section sets configurations for your hard disk and other integrated peripherals.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
 Integrated Peripherals

			ITEM HELP
On-Chip Primary PCI IDE	Enabled		Menu Level
On-Chip Secondary PCI IDE	Enabled		
IDE Primary Master PIO	Auto		
IDE Primary Slave PIO	Auto		
IDE Secondary Master PIO	Auto		
IDE Secondary Slave PIO	Auto		
IDE Primary Master UDMA	Auto		
IDE Primary Slave UDMA	Auto		
IDE Secondary Master UDMA	Auto		
IDE Secondary Slave UDMA	Auto		
USB Controller	Enabled		
USB Keyboard Support	Disabled		
Init Display First	PCI Slot		
AC97 Audio	Auto		
IDE HDD Block Mode	Enabled		
POWER ON Function	BUTTON ONLY		
KB Power ON Password	Enter		
Hot Key Power ON	Ctrl-F1		
Onboard FDC Controller	Enabled		
Onboard Serial Port 1	3F8/IRQ4		
Onboard Serial Port 2	2F8/IRQ3		
UART Mode Select	Normal		
UR2 Duplex Mode	Half		
Onboard Parallel Port	378/IRQ7		
Parallel Port Mode	SPP		
ECP Mode Use DMA	3		
Game Port Address	201		
Midi Port Address	330		
Midi Port IRQ	10		

OnChip Primary/Secondary PCI IDE

The integrated peripheral controller contains an IDE interface with support for two IDE channels. Select *Enabled* to activate each channel separately.

IDE Primary/Secondary Master/Slave PIO

These fields allow your system hard disk controller to work faster. Rather than have the BIOS issue a series of commands that transfer to or from the disk drive, PIO (Programmed Input/Output) allows the BIOS to communicate with the controller and CPU directly.

The system supports five modes, numbered from 0 (default) to 4, which primarily differ in timing. When Auto is selected, the BIOS will select the best available mode.

IDE Primary/Secondary Master/Slave UDMA

These fields allow your system to improve disk I/O throughput to 33Mb/sec with the Ultra DMA/33 feature. The options are *Auto* and *Disabled*.

USB Controller

The options for this field are *Enabled* and *Disabled*. By default, this field is set to *Enabled*.

USB Keyboard Support

The options for this field are *Enabled* and *Disabled*. By default, this field is set to *Disabled*.

Init Display First

This field allows the system to initialize first the VGA card on chip or the display on the PCI Slot. By default, the *PCI Slot* VGA is initialized first.

AC97 Audio

The default setting of the AC97 Audio is *Auto*.

IDE HDD Block Mode

This field allows your hard disk controller to use the fast block mode to transfer data to and from your hard disk drive.

POWER ON Function

This field allows powering on by the following methods:

Password	Hot KEY	Mouse Left	Mouse Right
Any KEY	BUTTON ONLY	Keyboard 98	

KB Power ON Password

This field allows you to set the power on function via the keyboard.

Hot Key Power ON

This field allows you to set the power on function via hot keys on the keyboard including Ctrl-F1 to Ctrl-F12.

Onboard FDC Controller

Select *Enabled* if your system has a floppy disk controller (FDC) installed on the board and you wish to use it. If you install an add-in FDC or the system has no floppy drive, select *Disabled* in this field. This option allows you to select the onboard FDD port.

Onboard Serial/Parallel Port

These fields allow you to select the onboard serial and parallel ports and their addresses. The default values for these ports are:

Serial Port 1	3F8H/IRQ4
Serial Port 2	2F8H/IRQ3
Parallel Port	378H/IRQ7

UART Mode Select

This field determines the UART 2 mode in your computer. The default value is *Normal*. Other options include *IrDA* and *ASKIR*.

Parallel Port Mode

This field allows you to determine parallel port mode function.

SPP	Standard Printer Port
EPP	Enhanced Parallel Port
ECP	Extended Capabilities Port

Midi Port Address

The option settings for this field are *330*, *400* and *Disabled*. The default setting is *330*.

Game Port Address

The default setting is *201*.

Midi Port IRQ

The default Midi Port IRQ is *10*.

Power Management Setup

The Power Management Setup allows you to save energy of your system effectively.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
Power Management Setup

ACPI Function	Enabled	ITEM HELP
ACPI Suspend Type	(S1 (POS)	Menu Level
Power Management	User Define	
Video Off Method	DPMS	
Video Off In Suspend	Yes	
Suspend Type	Stop Grant	
Modem Use IRQ	3	
Suspend Mode	Disabled	
HDD Power Down	Disabled	
Soft-Off by PWR-BTTN	Instant-Off	
Wake-up by PCI card	Disabled	
Power On by Ring	Disabled	
Resume by Alarm	Disabled	
Date (of Month) Alarm	0	
Time (hh:mm:ss) Alarm	0: 0: 0	
** Reload Global Timer Events **		
Primary IDE 0	Enabled	
Primary IDE 1	Enabled	
Secondary IDE 0	Enabled	
Secondary IDE 1	Enabled	
FDD, COM, LPT Port	Enabled	
PCI PIRQ[A-D] #	Enabled	

ACPI Function

Enable this function to support ACPI (Advance Configuration and Power Interface).

ACPI Suspend Type

This option sets the ACPI Power Management standby state. The default is S1 (POS).

Power Management

This field allows you to select the type of power saving management modes. There are four selections for Power Management.

Min. Power Saving	Minimum power management
Max. Power Saving	Maximum power management.
User Define	Each of the ranges is from 1 min. to 1hr. Except for HDD Power Down which ranges from 1 min. to 15 min. (Default)

Video Off Method

This field defines the Video Off features. There are three options.

- | | |
|------------------|--|
| V/H SYNC + Blank | Default setting, blank the screen and turn off vertical and horizontal scanning. |
| DPMS | Allows the BIOS to control the video display card if it supports the DPMS feature. |
| Blank Screen | This option only writes blanks to the video buffer. |

Video Off In Suspend

When enabled, the video is off in suspend mode. The default setting is *Yes*.

Suspend Type

The default setting for the Suspend Type field is *Stop Grant*.

Modem Use IRQ

This field sets the IRQ used by the Modem. By default, the setting is *3*.

Suspend Mode

When enabled, and after the set time of system inactivity, all devices except the CPU will be shut off.

HDD Power Down

When enabled, and after the set time of system inactivity, the hard disk drive will be powered down while all other devices remain active.

Soft-Off by PWRBTN

This field defines the power-off mode when using an ATX power supply. The *Instant Off* mode allows powering off immediately upon pressing the power button. In the *Delay 4 Sec* mode, the system powers off when the power button is pressed for more than four seconds or enters the suspend mode when pressed for less than 4 seconds. The default value is *Instant Off*.

Wake-up by PCI Card

This field enables or disables the wake up function through a PCI card.

Power On by Ring

This field enables or disables the power on of the system through the modem connected to the serial port or LAN.

Resume by Alarm

This field enables or disables the resumption of the system operation. When enabled, the user is allowed to set the *Date* and *Time*.

Reload Global Timer Events

The HDD, FDD, COM, LPT Ports, and PCI PIRQ are I/O events which can prevent the system from entering a power saving mode or can awaken the system from such a mode. When an I/O device wants to gain the attention of the operating system, it signals this by causing an IRQ to occur. When the operating system is ready to respond to the request, it interrupts itself and performs the service.

PNP/PCI Configurations

This option configures the PCI bus system. All PCI bus systems on the system use INT#, thus all installed PCI cards must be set to this value.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
PnP/PCI Configurations

Reset Configuration Data	Disabled	<p>ITEM HELP</p> <p>Menu Level</p> <p>Default is Disabled. Select Enabled to reset Extended System Configuration Data (ESCD) when you exit Setup if you have installed a new add-on and the system reconfiguration has caused such a serious conflict that the OS cannot boot</p>
Resources Controlled By	Auto (ESCD)	
IRQ Resources	Press Enter	
PCI/VGA Palette Snoop	Disabled	

Reset Configuration Data

This field allows you to determine whether to reset the configuration data or not. The default value is *Disabled*.

Resources Controlled by

This PnP BIOS can configure all of the boot and compatible devices automatically with the use of a use a PnP operating system such as Windows 95.

PCI/VGA Palette Snoop

Some non-standard VGA display cards may not show colors properly. This field allows you to set whether or not MPEG ISA/VESA VGA cards can work with PCI/VGA. When this field is enabled, a PCI/VGA can work with an MPEG ISA/VESA VGA card. When this field is disabled, a PCI/VGA cannot work with an MPEG ISA/VESA card.

PC Health Status

This section shows the parameters in determining the PC Health Status. These parameters include temperatures, fan speeds and voltages.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
PC Health Status

		ITEM HELP
Shutdown Temperature	Disabled	
Vcore (V)	1.63V	
+1.8(V)	1.79V	
VCC3(V)	3.37V	
+5(V)	5.05V	
+12(V)	12.09V	
-12(V)	(-)12.03V	
-5(V)	-5.05V	
5VSB(V)	4.70V	
Voltage Battery	3.24V	
System Temp.	41°C	
CPU Temp.	59°C	
System Temp.	41°C	
CPU Fan Speed	4166 RPM	
System Fan Speed	0 RPM	
System Fan Speed	0 RPM	

Shutdown Temperature

This field allows the user to set the temperature by which the system automatically shuts down once the threshold temperature is reached. This function can help prevent damage to the system that is caused by overheating.

Temperatures/Fan Speeds/Voltages

These fields are the parameters of the hardware monitoring function feature of the board. The values are read-only values as monitored by the system and show the PC health status.

Frequency/Voltage Control

This section shows the user how to configure the processor frequency.

CMOS Setup Utility – Copyright ©1984-2001 Award Software
 Frequency/Voltage Control

Auto Detect DIMM/PCI Clk	Disabled	ITEM HELP
Spread Spectrum	Disabled	Menu Level
Host CPU/PCI Clock	Default	
CPU Clock Ratio	X 3	

Auto Detect DIMM/PCI Clk

This field enables or disables the auto detection of the DIMM/PCI clock. The default setting is *Disabled*.

Spread Spectrum

This field sets the value of the spread spectrum. The default setting is *Disabled*. This field is for CE testing use only.

Host CPU/PCI Clock

The Host CPU/PCI Clock has a default setting of *Default* which automatically detects the systems host CPU clock and PCI clock. You can also use this parameter to overclock your system. However, it is important to note that overclocking the system/CPU can cause your system to become unstable or crash.

CPU Clock Ratio

The CPU Ratio, also known as the CPU bus speed multiplier, can be configured through this field. The default setting is *X 3*. This parameter can be used in conjunction with the above field to change the processor's speed.

Load Fail-Safe Defaults

This option allows you to load the troubleshooting default values permanently stored in the BIOS ROM. These default settings are non-optimal and disable all high-performance features.

Load Setup Defaults

This option allows you to load the default values to your system configuration. These default settings are optimal and enable all high performance features.

Set Supervisor/User Password

These two options set the system password. Supervisor Password sets a password that will be used to protect the system and Setup utility. User Password sets a password that will be used exclusively on the system. To specify a password, highlight the type you want and press <Enter>. The Enter Password: message prompts on the screen. Type the password, up to eight characters in length, and press <Enter>. The system confirms your password by asking you to type it again. After setting a password, the screen automatically returns to the main screen.

To disable a password, just press the <Enter> key when you are prompted to enter the password. A message will confirm the password to be disabled. Once the password is disabled, the system will boot and you can enter Setup freely.

Save & Exit Setup

This option allows you to determine whether or not to accept the modifications. If you type “Y”, you will quit the setup utility and save all changes into the CMOS memory. If you type “N”, you will return to Setup utility.

Exit Without Saving

Select this option to exit the Setup utility without saving the changes you have made in this session. Typing “Y” will quit the Setup utility without saving the modifications. Typing “N” will return you to Setup utility.

This page is intentionally left blank.

Drivers Installation

This section describes the installation procedures for software and drivers under the Windows 98, Windows NT 4.0 and Windows 2000. The software and drivers are included with the board. If you find the items missing, please contact the vendor where you made the purchase. The contents of this section include the following:


I815E Windows 98 Drivers Installation	48
Intel Software Installation Utility.....	48
Intel Ultra ATA Storage Driver	49
Intel 815E Chipset VGA Driver	51
SigmaTel AC97 Audio Drivers	52
I815E Windows NT 4.0 Drivers Installation	54
Intel Ultra ATA Storage Driver	54
Intel 815E Chipset VGA Driver	57
SigmaTel AC97 Audio Drivers	59
I815E Windows 2000 Drivers Installation	62
Intel Software Installation Utility.....	62
Intel Ultra ATA Storage Driver	63
Intel 815E Chipset VGA Driver	65
SigmaTel AC97 Audio Drivers	66
Intel 82559 LAN Drivers Installation.....	68
Introduction	68
Making Floppy Disks for NetWare and Windows Installation	68
Installing LAN Drivers for Windows 95.....	69
Installing LAN Drivers for Windows 98.....	69
Installing LAN Drivers for Windows NT.....	70
Installing LAN Drivers for Windows 2000	70
TV Out Drivers Installation.....	71

I815E Windows 98 Drivers Installation

Intel Software Installation Utility

The Intel Chipset Software Installation Utility will enable Plug & Play INF support for Intel chipset components. Follow the instructions below to complete the installation under Windows 98.

1. Insert the CD that comes with the board. In the initial screen, Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel Chipset Software Installation Utility.
3. When the Welcome screen appears, click Next to continue.
4. Click Yes to accept the software license agreement and proceed with the installation process.
5. On the Readme Information screen, click Next to continue the installation.

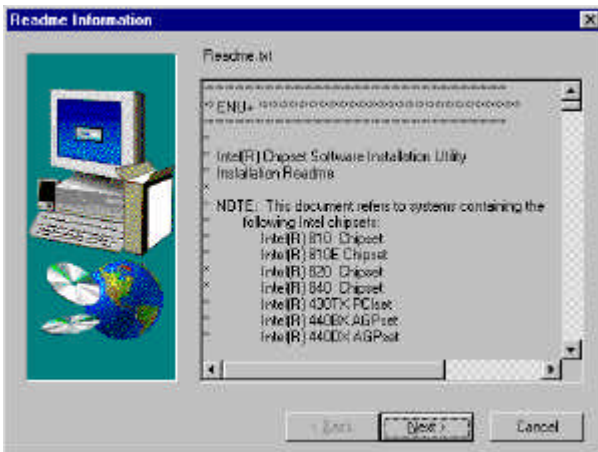


6. The Setup process is now complete. Click Finish to restart the computer and for changes to take effect. When the computer has restarted, the system will be able to find some devices. Restart your computer when prompted.


Intel Ultra ATA Storage Driver

Follow the steps below to install Intel Ultra ATA Storage Driver with the InstallShield Wizard under Windows 98.


1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel Ultra ATA IDE Driver.
3. The Welcome screen of the Install Shield Wizard for Intel Ultra ATA Storage Driver appears. To continue, click Next.
4. Click Yes to accept the software license agreement and proceed with the installation process.
5. You are now required to Select the folder where Setup will install files. Click Next to accept the default folder or click Browse to configure the location.

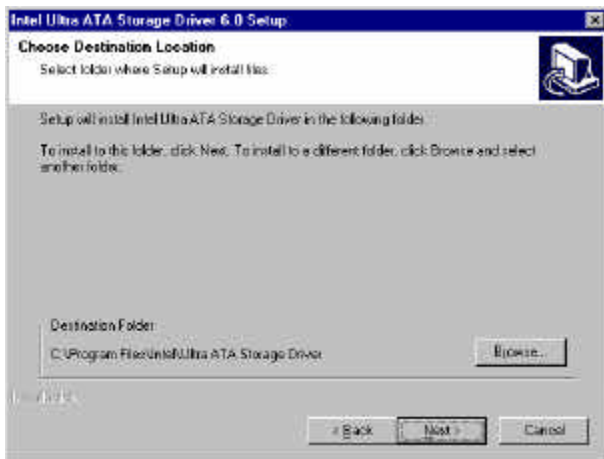

6. You are now asked to select a program folder. Click Next to accept the default program folder or enter the folder name you prefer.

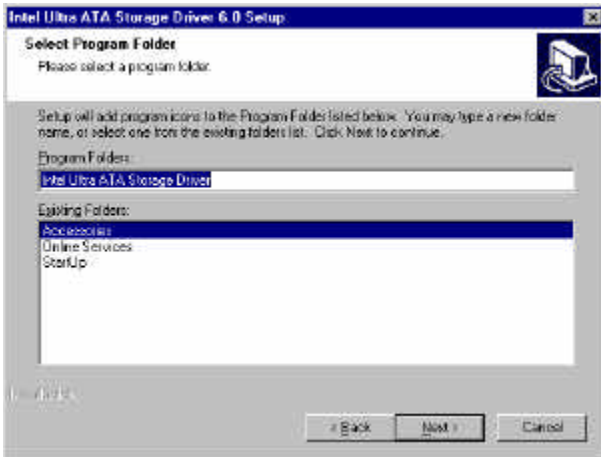

7. The InstallShield Wizard has completed installation. Click Finish for the computer to restart and changes to take effect.

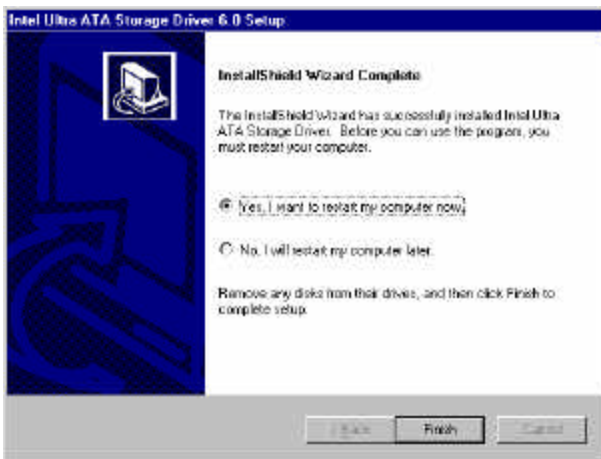

Intel 815E Chipset VGA Driver

Follow the steps below to install Intel 81x Family Chipset Graphics Driver Software under Windows 98.

1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel 815x Chipset Graphics Driver.
3. The Welcome screen of the Intel 81x Family Chipset Graphics Driver Software Setup program appears. To continue, click Next.
4. Click Yes to accept the software license agreement and proceed with the installation process.




5. The Setup program has now completed installation. Click Finish for the computer to restart and changes to take effect.


SigmaTel AC97 Audio Drivers

Follow the steps below to install SigmaTel AC97 Audio Drivers on your system under Windows 98.

1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click SigmaTel AC97 Audio Driver.
3. The Welcome screen of the SigmaTel AC97 Audio Driver Setup program appears. To continue, click Next.
4. Click Yes to accept the software license agreement and proceed with the installation process.
5. Select Install and click Next to install SigmaTel AC97 Audio Drivers on your system.

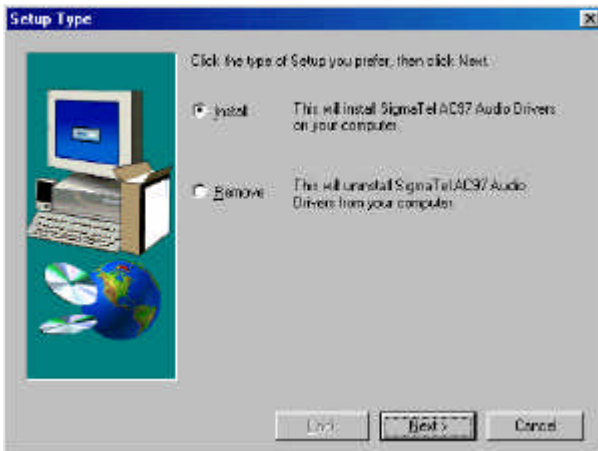

6. The Setup program has now completed installation. Click Finish for the computer to restart and changes to take effect.

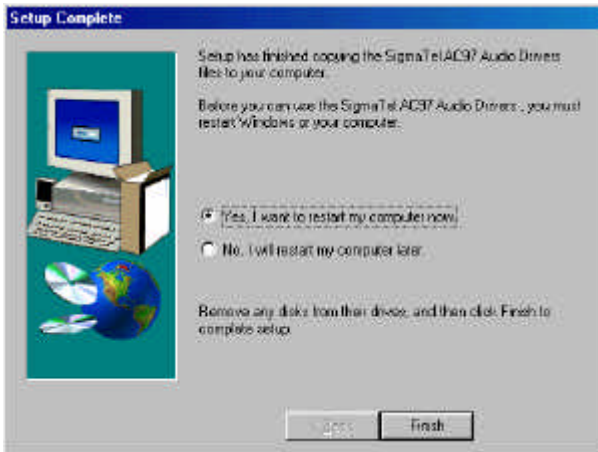

7. After the system has restarted, a screen would appear saying it was able to find the device “Intel AC’97 Audio Controller.” Click Next to continue.

8. Now click Select to “Search for the best driver for your device (Recommended).” Click Next, then click Select to “specify a location”. Now enter the path as “d:\intel\i815e\sound\win98\driver\wdm” (This is assuming drive D: is your CD-ROM drive.


9. Now click Next and Next again. You are now prompted to place the Windows 98 CD into the CD-ROM drive. Do so accordingly and click OK. Then click Finish to restart the system and for changes to take effect.

I815E Windows NT 4.0 Drivers Installation


Intel Ultra ATA Storage Driver

Follow the steps below to install Intel Ultra ATA Storage Driver with the InstallShield Wizard under Windows NT 4.0.


1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel Ultra ATA IDE Driver.
3. The Welcome screen of the Install Shield Wizard for Intel Ultra ATA Storage Driver appears. To continue, click Next.

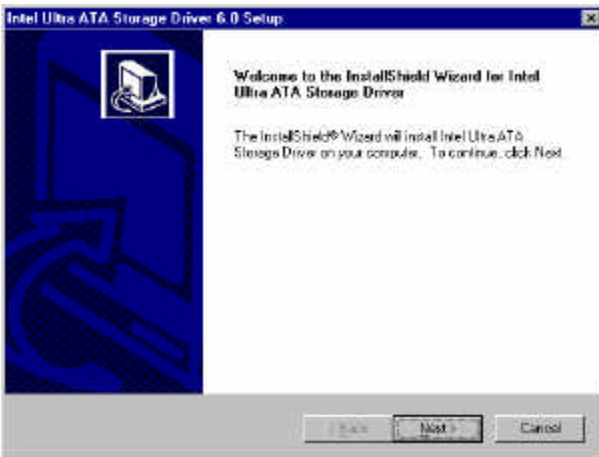


4. Click Yes to accept the software license agreement and proceed with the installation process.

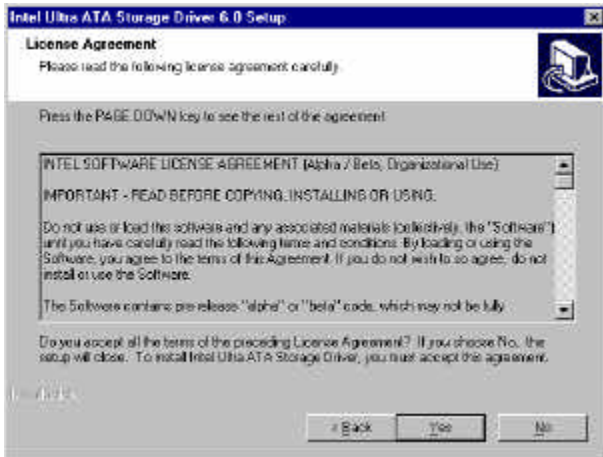


5. You are now required to Select the folder where Setup will install files. Click Next to accept the default folder or click Browse to configure the location.

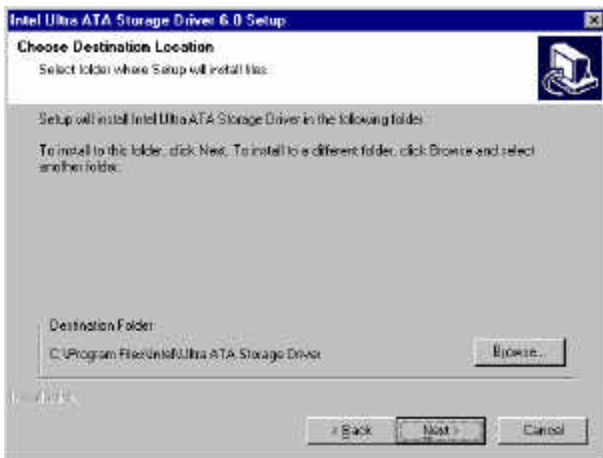

6. You are now asked to select a program folder. Click Next to accept the default program folder or enter the folder name you prefer.

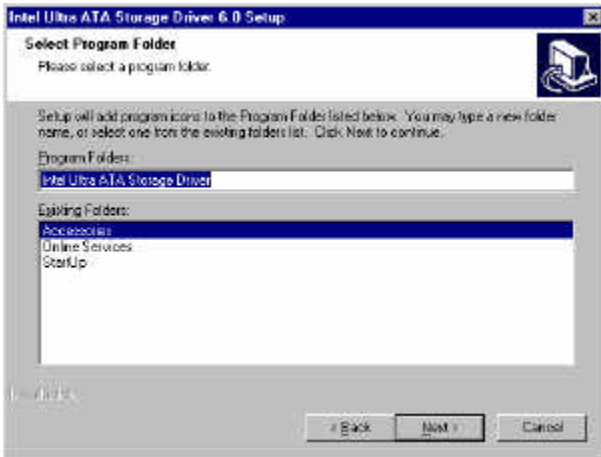


7. The InstallShield Wizard has completed installation. Click Finish for the computer to restart and changes to take effect.

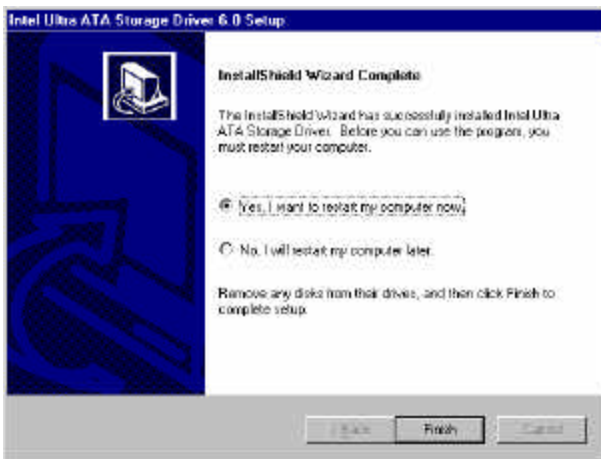

Intel 815E Chipset VGA Driver

Follow the steps below to install Intel 81x Family Chipset Graphics Driver Software under Windows NT 4.0.


1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel 81x Chipset Graphics Driver.
3. The Welcome screen of the Intel 81x Family Chipset Graphics Driver Software Setup program appears. To continue, click Next.

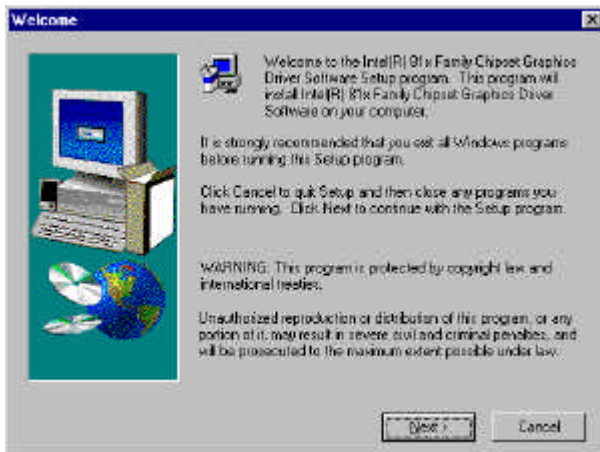

4. Click Yes to accept the software license agreement and proceed with the installation process.




5. The Setup program has now completed installation. Click Finish for the computer to restart and changes to take effect.

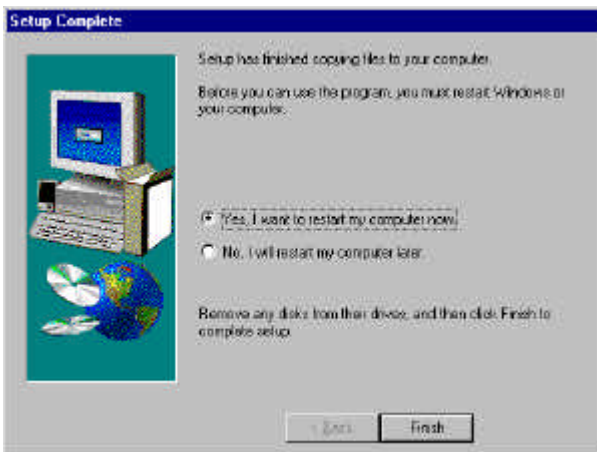


SigmaTel AC97 Audio Drivers

Follow the steps below to install SigmaTel AC97 Audio Drivers on your system under Windows NT 4.0.


1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click SigmaTel AC97 Audio Driver.
3. The Welcome screen of the SigmaTel AC97 Audio Driver Setup program appears. To continue, click Next.

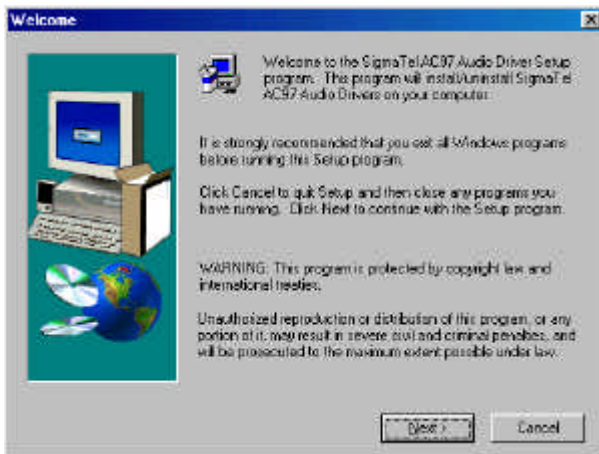


4. Click Yes to accept the software license agreement and proceed with the installation process.

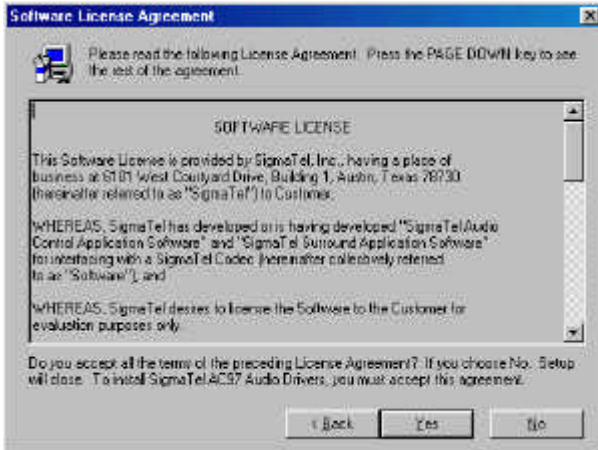

5. Select Install and click Next to install SigmaTel AC97 Audio Drivers on your system.

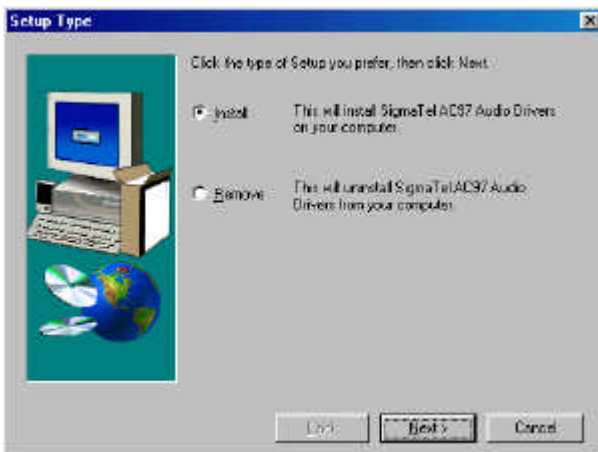

6. The Setup program has now completed installation. Click Finish for the computer to restart and changes to take effect.

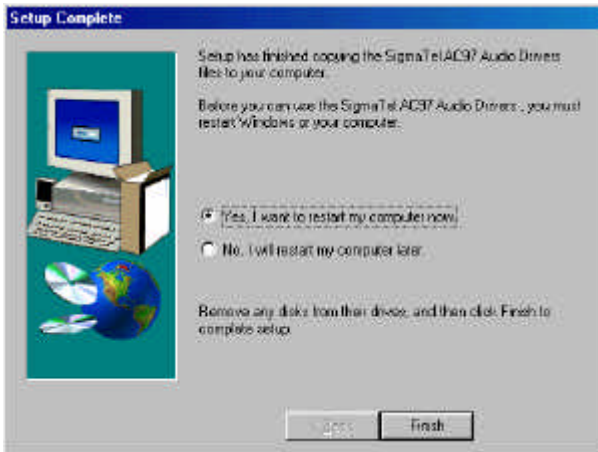


7. After the system has restarted, a screen would appear showing some installation information. Restart the system when prompted to complete the audio driver installation.

I815E Windows 2000 Drivers Installation

Intel Software Installation Utility

The Intel Chipset Software Installation Utility will enable Plug & Play INF support for Intel chipset components. Follow the instructions below to complete the installation under Windows 2000.

1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel Chipset Software Installation Utility.
3. When the Welcome screen appears, click Next to continue.
4. Click Yes to accept the software license agreement and proceed with the installation process.
5. On the Readme Information screen, click Next to continue the installation.

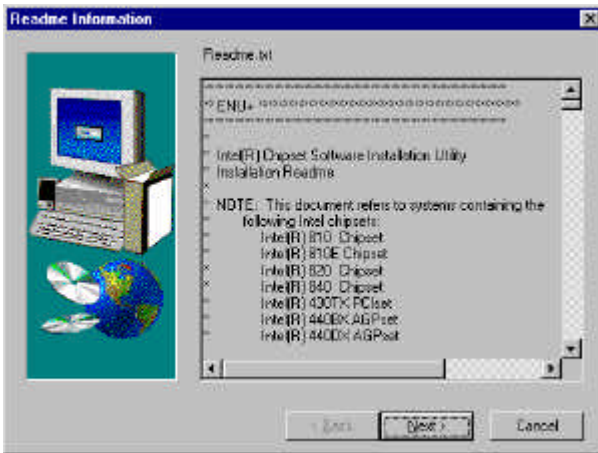


6. The Setup process is now complete. Click Finish to restart the computer and for changes to take effect. When the computer has restarted, the system will be able to find some devices. Restart your computer when prompted.


Intel Ultra ATA Storage Driver

Follow the steps below to install Intel Ultra ATA Storage Driver with the InstallShield Wizard under Windows 98.


1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel Ultra ATA IDE Driver.
3. The Welcome screen of the Install Shield Wizard for Intel Ultra ATA Storage Driver appears. To continue, click Next.
4. Click Yes to accept the software license agreement and proceed with the installation process.
5. You are now required to Select the folder where Setup will install files. Click Next to accept the default folder or click Browse to configure the location.

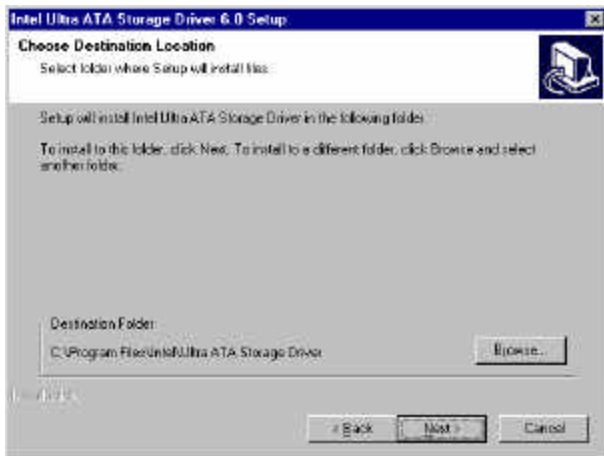

6. You are now asked to select a program folder. Click Next to accept the default program folder or enter the folder name you prefer.

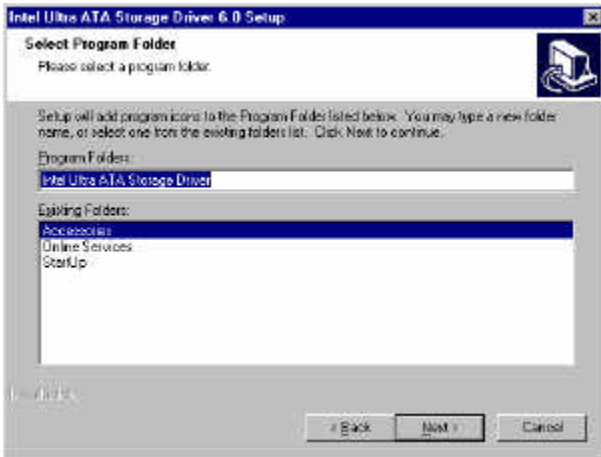

7. The InstallShield Wizard has completed installation. Click Finish for the computer to restart and changes to take effect.

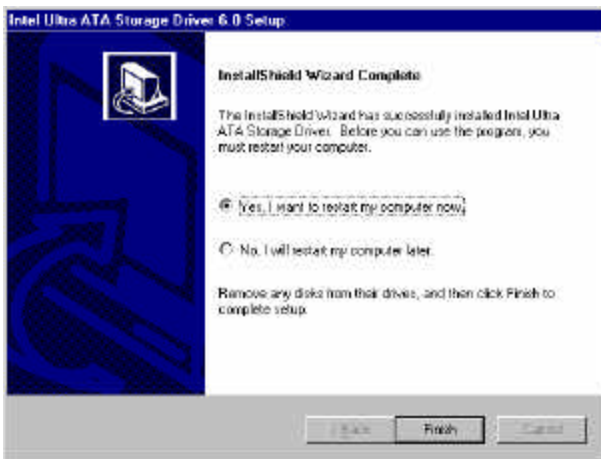

Intel 815E Chipset VGA Driver

Follow the steps below to install Intel 81x Family Chipset Graphics Driver Software under Windows 2000.

1. Insert the CD that comes with the board. In the initial screen, click Intel 815(E) Driver.
2. In the Intel 815 Driver screen, click Intel 815x Chipset Graphics Driver.
3. The Welcome screen of the Intel 815x Family Chipset Graphics Driver Software Setup program appears. To continue, click Next.
4. Click Yes to accept the software license agreement and proceed with the installation process.




5. The Setup program has now completed installation. Click Finish for the computer to restart and changes to take effect.

SigmaTel AC97 Audio Drivers


Follow the steps below to install SigmaTel AC97 Audio Drivers on your system under Windows 2000.

1. Insert the CD that comes with the board. The CD will autorun and show an initial screen. Click Intel 815(E) Driver.
2. Click SigmaTel AC97 Audio Driver.
3. The Welcome screen of the SigmaTel AC97 Audio Driver Setup program appears. To continue, click Next.

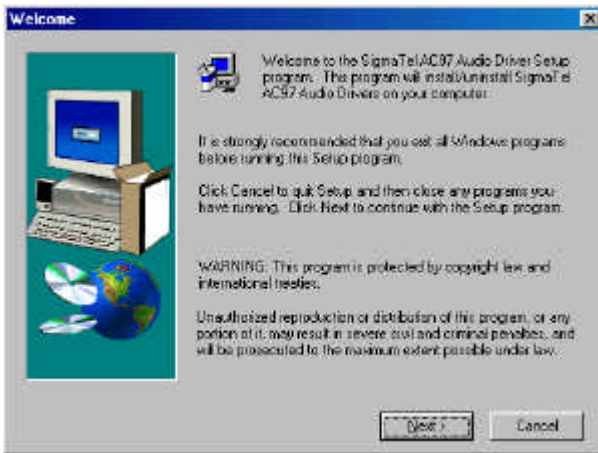


4. Click Yes to accept the software license agreement and proceed with the installation process.
5. Select Install and click Next to install SigmaTel AC97 Audio Drivers on your system.

6. A window appears indicating that the software to be installed does not contain a Microsoft digital signature. Click Yes to continue the installation process.

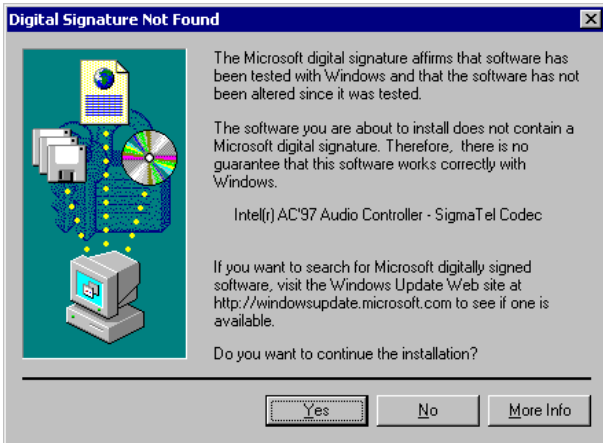

7. The Setup program has now completed installation. Click Finish for the computer to restart and changes to take effect.

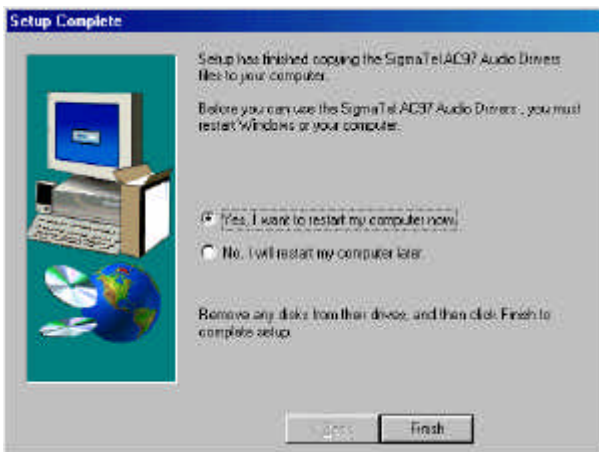

Intel 82559 LAN Drivers Installation

Introduction

Intel 82559 a 32-bit 10/100Mbps Ethernet controller for PCI local bus-compliant PCs. It supports bus mastering architecture, and auto-negotiation feature that can be used for both 10Mbps and 100Mbps connection.

Making Floppy Disks for NetWare and Windows Installation

You need to use a floppy disk to install the LAN drivers. Use the MAKEDISK.BAT utility located in the \LAN\I8255X\MAKEDISK directory on the CD.

MAKEDISK [operating system] [destination]

where [operating system] is the OS for which you are creating the diskette, and [destination] is the drive letter and path (such as A:). If no destination is specified, the A: drive will be used.

The possible [operating system] options are:

NT = Microsoft Windows NT

W2K = Microsoft Windows* 2000

W9X = Microsoft Windows* 95 and Windows 98

NW = Novell NetWare servers and clients

DOS = Microsoft DOS and IBM OS2

Make sure you have a 1.44 MB formatted, non-bootable diskette in the floppy drive when using this utility.

NOTE: The utility MUST be run from the \LAN\I8255X \MAKEDISK directory.

Alternately, you can use the following .BAT files (located in the root directory on this CD) to simplify this process:

MAKEW9X.BAT -- Creates a drivers disk for Windows 95 and Windows 98.

MAKENT.BAT -- Creates a drivers disk for Windows NT.

MAKEW2K.BAT -- Creates a drivers disk for Windows 2000.

MAKENW.BAT -- Creates a drivers disk for Novell NetWare servers and clients.

Installing LAN Drivers for Windows 95

Follow these steps to install the Intel 82559 LAN/Ethernet driver for Windows 95:

1. From the **Control Panel**, double-click the **System** icon.
2. Click the **Device Manager** tab.
3. Double-click **Other Devices** (question mark icon) in the list area.
4. Double-click a PCI Ethernet Controller.
5. Click the **Driver** tab, then click **Update Driver**.
6. Insert the Configuration and Drivers disk or CD in the appropriate drive, and at the Update Device Driver Wizard, select "**No**" and click **Next**.
7. Click **Have Disk**, insert the Configuration and Drivers disk in the appropriate drive, and click **OK**.
8. At the Select Device dialog box, click **OK** again.
9. Follow any prompts for Windows 95 installation disks and restart when prompted.

Note: The Windows 95 system files are typically available on the Windows 95 CD in the win95 directory (D:\win95).

Installing LAN Drivers for Windows 98

Follow these steps to install the Intel 82559 LAN/Ethernet driver for Windows 98:

1. From the **Control Panel**, double-click the **System** icon.
2. Click the **Device Manager** tab.
3. Double-click **Other Devices** or Network Adapters in the list area.
4. Double-click a PCI Ethernet Controller.
5. Click the **Driver** tab, then click **Update Driver**.
6. Click **Next** at the Update Device Driver Wizard.
7. Select "**Display a list of all the drivers...**" and click **Next**.
8. Insert the Intel adapter disk and click **Have Disk**.
9. Enter the appropriate drive for your disk media (A:) and click **OK**.
10. Click **OK** at the Select Device dialog box.
11. The Update Wizard displays the message that it has found the driver. Click **Next**.
12. Click **Finish**.
13. Restart your computer when prompted.

Installing LAN Drivers for Windows NT

Follow the steps below to install the PCI Ethernet/LAN drivers Windows NT 4.0.

1. Under the Windows NT 4.0 environment, click **Start → Control Panel**. Double click **Network → Adapters → Add**.
2. Select “**Have disk ...**” and insert the floppy diskette containing the Ethernet drivers for Windows NT 4.0 into the FDD drive, then click **OK**.
3. Click **OK → Close**, and then enter IP address.
4. Restart the system for changes to take effect.

Installing LAN Drivers for Windows 2000

Follow the steps below to install the PCI Ethernet/LAN drivers Windows 2000.


1. Under the Windows 2000 environment, click **Start → Control Panel**. Double click **System → Hardware → Device Manager → Other Devices**.
2. Double-click **Ethernet Controller**.
3. Click **Driver → Update Driver → Next**.
4. Now select “**Display a list of the known drivers for this device so that I can choose a specific driver.**”
5. Insert the floppy diskette containing the Intel Ethernet drivers into the FDD drive. Click **OK** and select “**Intel PRO/100 VE Network connection.**”
6. Click **Next → Next → Finish**. Close all tasks and restart the computer.

TV Out Drivers Installation


Introduction

The I815E 5.25" embedded board supports the optional TV out function with the optional IB742 TV Out Daughter Card. After you have installed the IBD742 daughter card onto I815E, install the TV-Out drivers by doing the following procedure.


1. Insert the diskette containing the TV Out driver files into the floppy disk drive. Under Windows 98, click START, then click RUN. Enter the filename to execute as **A:\setup** (assuming that Drive A is the floppy drive.) and press <ENTER>. Windows will start the TV-Out Patch Setup.

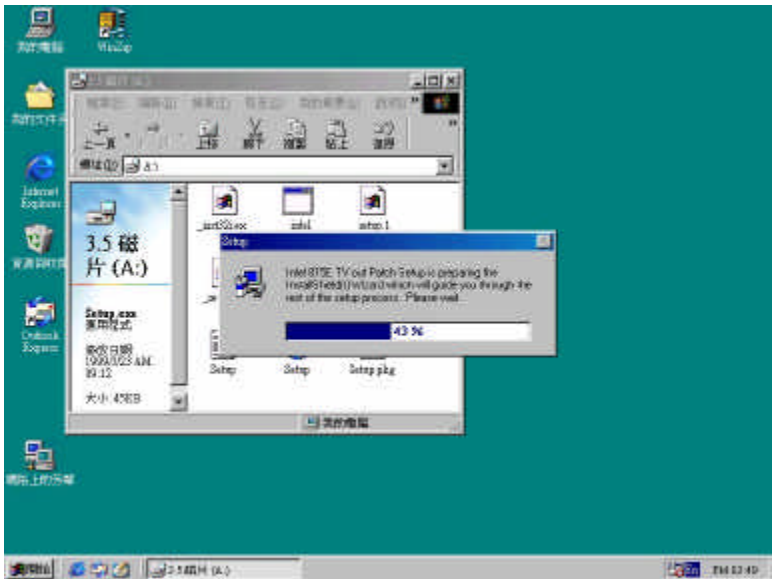


2. Click Next to continue with the Setup program.

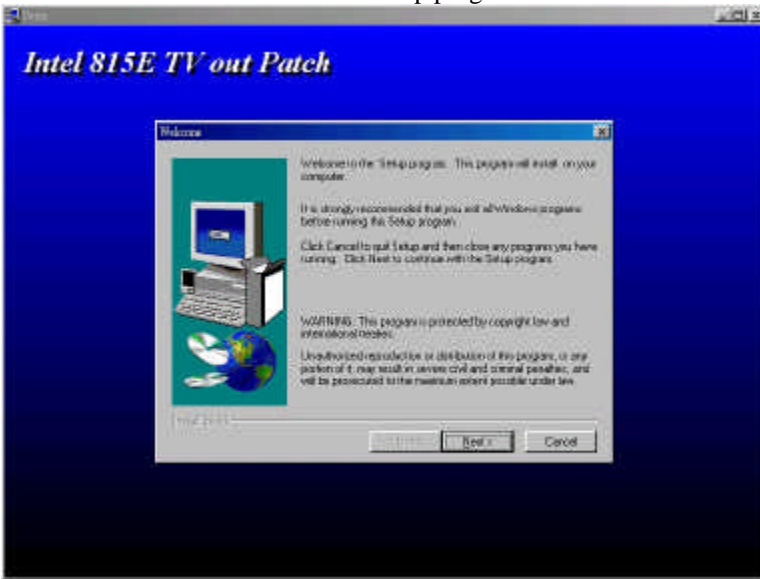

3. Click Next to begin copying the program files.

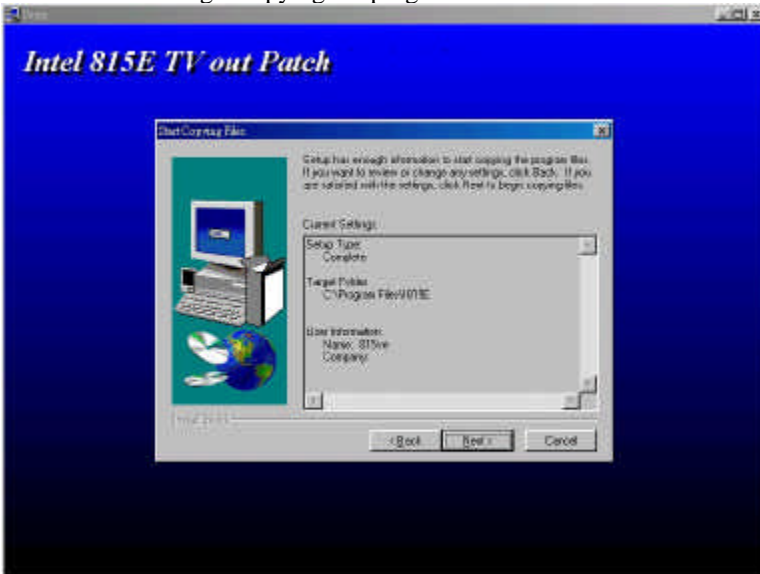

4. After file copying is finished, click Finish to restart the computer and for changes to take effect.

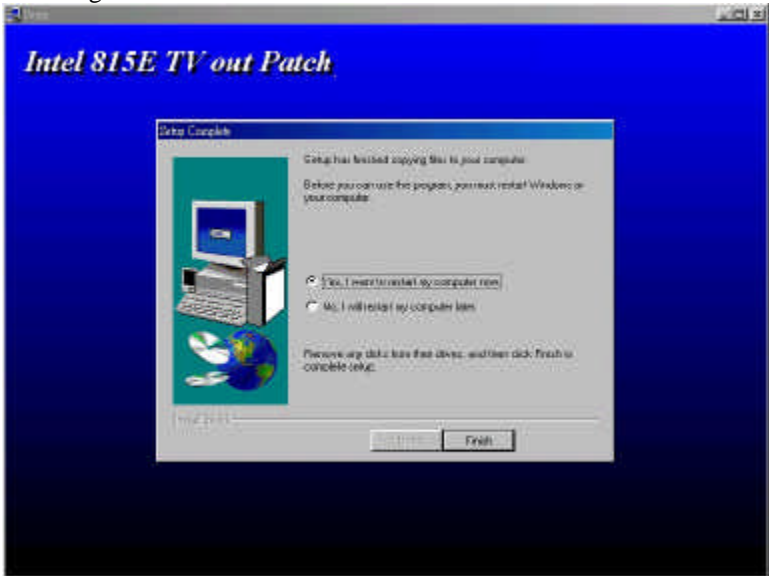

This page was intentionally left blank.

Appendix

A. I/O Port Address Map

B. Interrupt Request Lines (IRQ)

A. I/O Port Address Map

Each peripheral device in the system is assigned a set of I/O port addresses which also becomes the identity of the device. The following table lists the I/O port addresses used.

Address	Device Description
000h - 01Fh	DMA Controller #1
020h - 03Fh	Interrupt Controller #1
040h - 05Fh	Timer
060h - 06Fh	Keyboard Controller
070h - 07Fh	Real Time Clock, NMI
080h - 09Fh	DMA Page Register
0A0h - 0BFh	Interrupt Controller #2
0C0h - 0DFh	DMA Controller #2
0F0h	Clear Math Coprocessor Busy Signal
0F1h	Reset Math Coprocessor
1F0h - 1F7h	IDE Interface
278 - 27F	Parallel Port #2(LPT2)
2F8h - 2FFh	Serial Port #2(COM2)
2B0 - 2DF	Graphics adapter Controller
378h - 3FFh	Parallel Port #1(LPT1)
360 - 36F	Network Ports
3B0 - 3BF	Monochrome & Printer adapter
3C0 - 3CF	EGA adapter
3D0 - 3DF	CGA adapter
3F0h - 3F7h	Floppy Disk Controller
3F8h - 3FFh	Serial Port #1(COM1)

B. Interrupt Request Lines (IRQ)

Peripheral devices use interrupt request lines to notify CPU for the service required. The following table shows the IRQ used by the devices on board.

Level	Function
IRQ0	System Timer Output
IRQ1	Keyboard
IRQ2	Interrupt Cascade
IRQ3	Serial Port #2
IRQ4	Serial Port #1
IRQ5	Reserved
IRQ6	Floppy Disk Controller
IRQ7	Parallel Port #1
IRQ8	Real Time Clock
IRQ9	Reserved
IRQ10	Reserved
IRQ11	Reserved
IRQ12	PS/2 Mouse
IRQ13	80287
IRQ14	Primary IDE
IRQ15	Secondary IDE

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>