


GH-CCTV

CCTV Interface Module for GH-MK Concierge Station

- INSTRUCTIONS -

The GH-CCTV is a video adaptor that provides a connection for an external CCTV camera associated with the GH-MK concierge unit. When the GH-MK calls the tenant, the tenant will be able to view the CCTV camera's image on their monitor. The GH-MK must initiate the GH-CCTV before the video image can be sent to the tenant.

WIRING DIAGRAM:

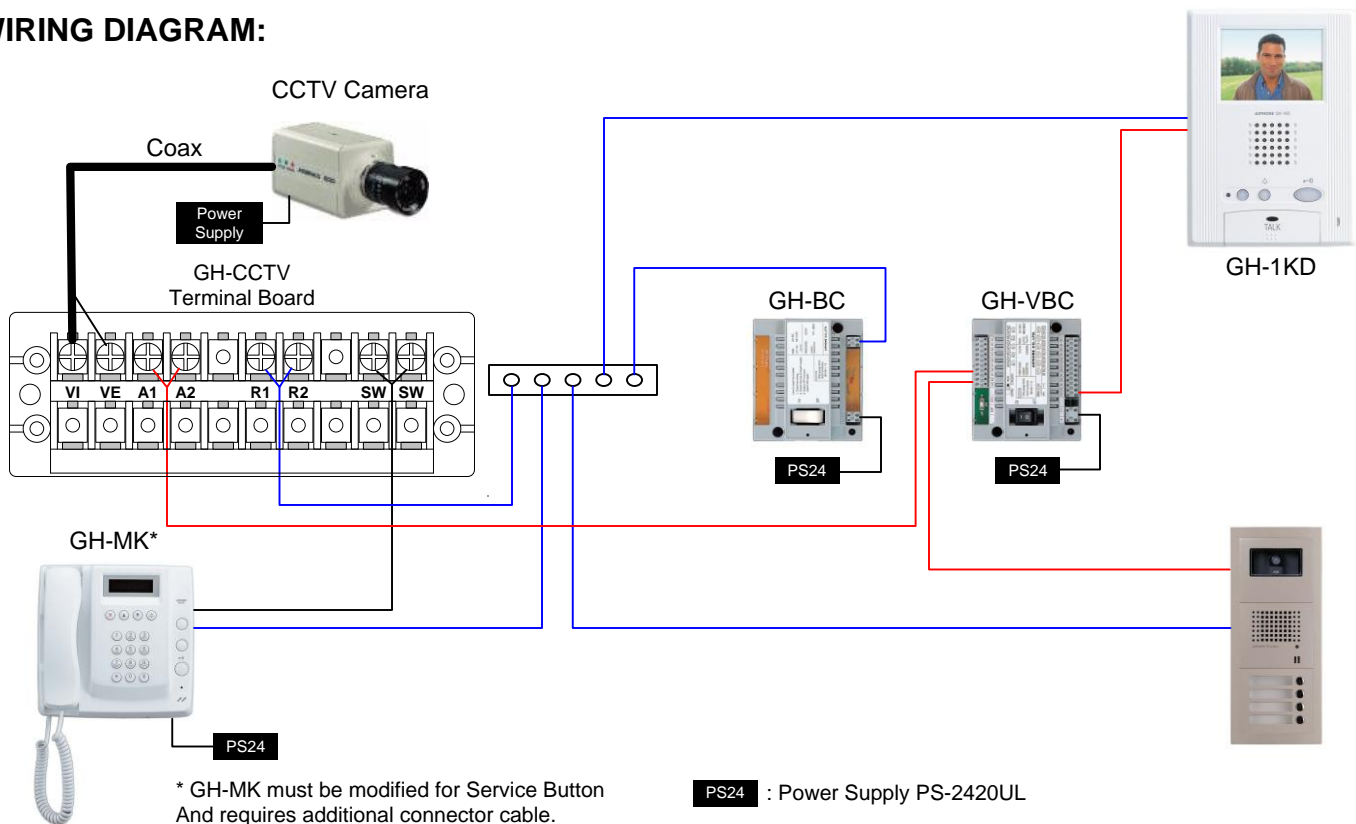

GH-CCTV CONFIGURATION:

1. Each GH-CCTV adaptor will act as one entrance panel in your GH system. Take this into account when designing your system. The GH-CCTV is default to entrance panel #1.
2. Open the GH-CCTV case to access the GH-DA/A module inside. Put this audio module in programming mode and assign the first button of the GH-SW to call the GH-MK.

OPERATION:

1. Press the Service button on the GH-MK to call the GH-CCTV. The GH-MK will then ring and display a call from entrance 1 (assuming default setting).
2. Pick up the GH-MK handset to answer the call from the GH-CCTV. Scroll to the entry of the tenant the visitor wishes to contact and press the bell button.
3. The GH-1KD will receive the call and audio from the GH-MK and the video image from the camera attached to the GH-CCTV.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>