


AN-8050DSW

AN Series Weather Resistant Door Station

- SUPPLEMENTAL INSTRUCTIONS -

The AN-8050DSW is a weatherized door station for the AN IP Network Intercom system. This unit is enhanced from the standard AN-8050DS, with the PC board conformal coated and a mylar cover over the microphone to protect from moisture. The rating on this unit is IP-54. Ingress protection rating indicates that the unit is protected against dust with limited ingress (no harmful deposit), and from water sprayed from all directions with limited ingress permitted.

AN-8050DSW

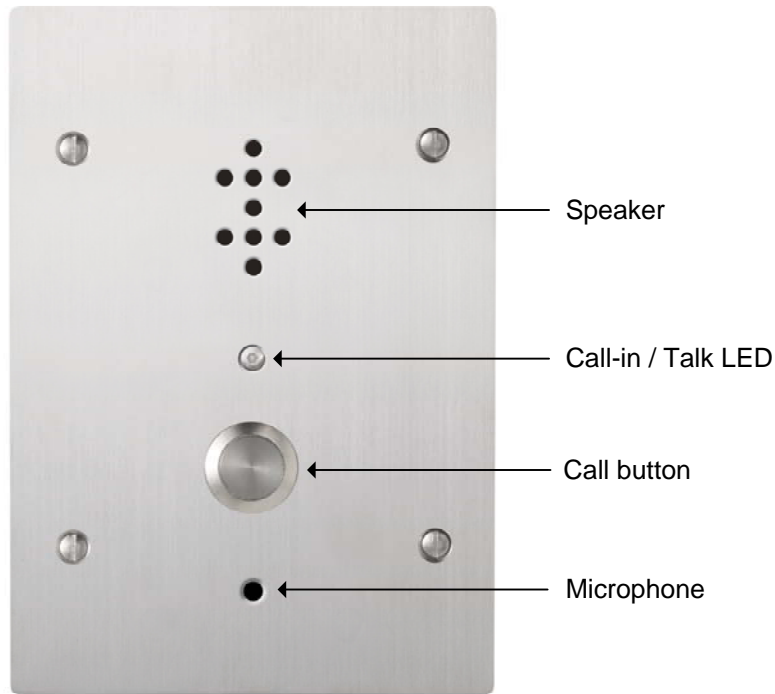

SPECIFICATIONS:

Power Source:	Supplied by AN-8000EX Exchange Unit
Speaker:	8 ohm, weather resistant
Microphone:	ECM, protected by mylar film
Call Button:	Normally open momentary contact
IP Rating:	IP-54
Temperature Rating:	-10° ~ 50°C; 14° ~ 122°F
Mounting:	Flush mount into 3-gang electrical box
Terminations:	PCB mounted terminal block
Wiring:	2 conductor solid, non-shielded, homerun from AN-8000EX to each door station
Wiring Distance:	4,920' w/ 22AWG, 2,950" w/ 24AWG
Dimensions (HxWxD):	6-3/8" x 4-9/16" x 2"

NOTE:

Only information relating to the characteristics of the AN-8050DSW are shown here. Please refer to standard AN-8050DS door station instructions, and AN-8000 Series Installation Manual for complete installation and programming information.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>