

LIFETIME™ 5' X 32" IA-LHO / RHO

Comfortable bathing design with form-fitted backrest and molded-in armrests

- Model# 2425L-LHO Built-In Integral Apron Left Hand Drain Outlet (specify color)**
- Model# 2425L-RHO Built-In Integral Apron Right Hand Drain Outlet (specify color)**
 - Acrylic with fiberglass reinforcement
 - Lifetime Overflow Drain for maximum water depth
 - Integral apron with removable access panel
 - Integral three-sided, tiling / water retention flange
 - 1.4 HP self-draining pump/motor with dry run seal
 - Eight flow adjustable jets including:
 - Two adjustable Ideal Flow Comfort Jets™
 - Six adjustable Comfort Jets™
 - Two silent air volume controls
 - Side-mounted On/Off control
 - Designed with undermount installation option
 - Complete factory installed and tested whirlpool system
- Model# 2425LC-LHO Built-In Integral Apron Left Hand Drain Outlet (specify color)**
- Model# 2425LC-RHO Built-In Integral Apron Right Hand Drain Outlet (specify color)**
 - Same as above with the EverClean™ whirlpool system. The EverClean™ antimicrobial system incorporates AlphaSan®, a patented antimicrobial agent manufactured right into the circulation system components, which suppresses the growth of unsightly algae, fungus, mold and mildew.



Components Required:

- Bath Filler*: (specify finish)
- Bath Drain: 1599.205.XXX (specify color)
OR 1599.500.020 (white only)

Custom Accessories Available:

- E-Z-Install™ Whirlpool Heater - EZHEAT-100

* See American Standard Faucet Selector

Nominal Dimensions:

60" x 32" x 21-1/2"
(1524 x 813 x 546mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

Model 2425L-LHO Shown

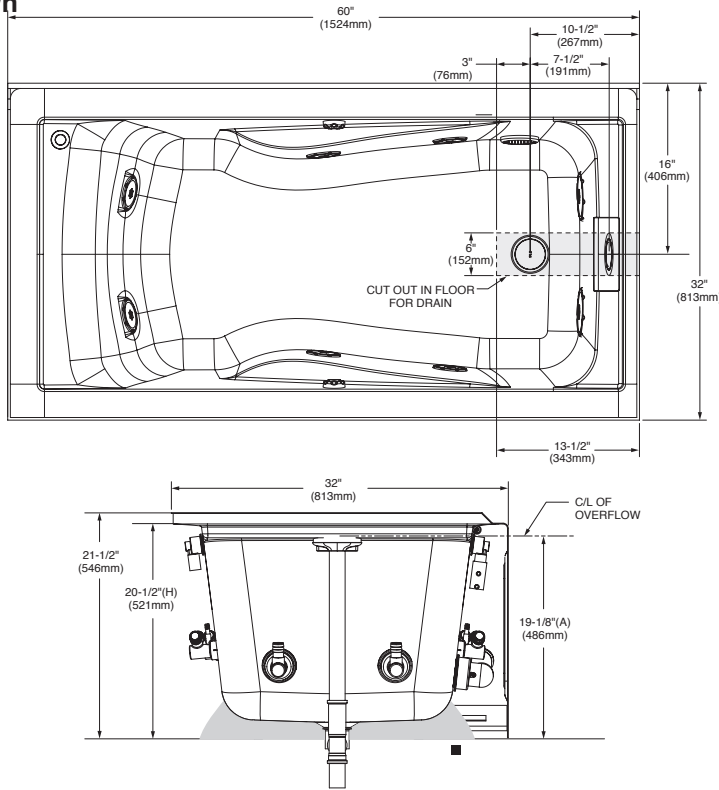

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

GENERAL SPECIFICATIONS FOR 2425L WHIRLPOOL	
INSTALLED SIZE	60 x 32 x 20-1/2 (1524 x 813 x 521mm)
WEIGHT	92 Lbs. (42 Kg.)
WEIGHT w/WATER	675 Lbs. (306 Kg.)
GAL. TO OVERFLOW	70 Gal. (265 L.)
WHIRLPOOL MIN. OPERATING VOL.	39 Gal. (148 L.)
BATHING WELL AT SUMP	42 x 22 (1067 x 559mm)
BATHING WELL AT RIM	53 x 25-1/2 (1346 x 648mm)
WATER DEPTH TO OVERFLOW	17-1/2 (445mm)
FLOOR LOADING (PROJECTED AREA)	51 Lbs./Sq.Ft. (247 Kgs./Sq.m)
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
PUMP	1.4 HP, 9.7 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>