



- Frequency response tailored for kick drum, percussion, brass, and other highly dynamic instruments
- Handles very high SPL at close range
- Big, warm low-frequency response with excellent presence
- Hypercardioid polar pattern reduces pickup of sounds from the sides and rear, improving isolation of desired sound source
- Durable performance for professional applications
- Hi-ENERGY® neodymium magnet for improved output and transient response
- Superior off-axis rejection for maximum gain before feedback
- Corrosion-resistant contacts from gold-plated XLRM-type connector
- Rugged, all-metal design and construction for years of trouble-free use
- Includes isolation clamp for shock protection, secure mounting and easy positioning

Output from the microphone's XLRM-type connector is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot"— positive acoustic pressure produces positive voltage at Pin 2.

To avoid phase cancellation and poor sound, all mic cables must be wired consistently: Pin 1-to-Pin 1, etc.

The ATM250 includes an AT8471 isolation clamp to provide secure mounting, versatile positioning and effective dampening of unwanted mechanical noise.

Take care to keep foreign particles from entering the windscreen. An accumulation of iron or steel filings on the diaphragm, and/or foreign material in the windscreen's mesh surface, can degrade performance.


ATM250 SPECIFICATIONS†

| | |
|---------------------------------|---|
| ELEMENT | Dynamic |
| POLAR PATTERN | Hypercardioid |
| FREQUENCY RESPONSE | 40-15,000 Hz |
| OPEN CIRCUIT SENSITIVITY | -54 dB (1.9 mV) re 1V at 1 Pa* |
| IMPEDANCE | 600 ohms |
| WEIGHT | 252 g (8.9 oz) |
| DIMENSIONS | 127.5 mm (5.02") long, 55.0 mm (2.17") diameter |
| OUTPUT CONNECTOR | Integral 3-pin XLRM-type |
| ACCESSORIES FURNISHED | AT8471 isolation clamp for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch |

†In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.

*1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

Specifications are subject to change without notice.

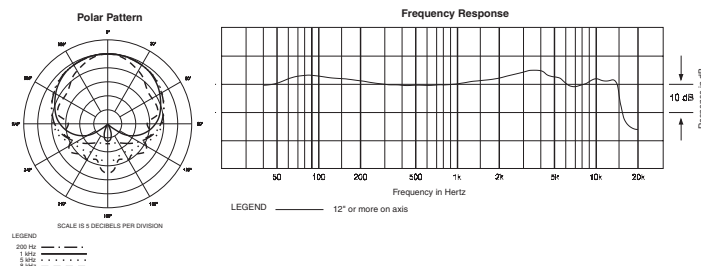

Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
Audio-Technica Limited, Old Lane, Leeds LS11 8AG England
www.audio-technica.com

P51799 ©2006 Audio-Technica U.S., Inc. Printed in China



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>