


Application

1. Liquid Cooling System

Characteristics

1. Pump Type: Centrifugal
2. Miniature Design
3. Ceramic Shaft & Bearing Type
4. Long Life
5. Low Vibration
6. Low Noise


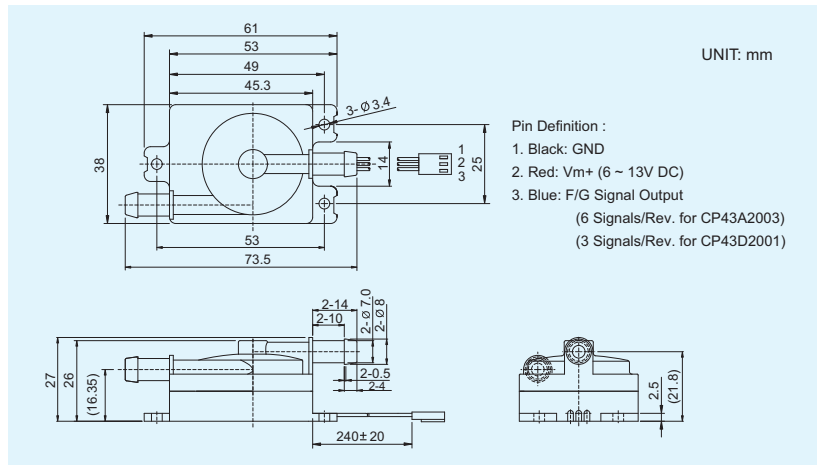


Specifications

| Model No. | Working Voltage (V) | Rated Voltage (V) | Max Water Head m-H ₂ O | Max Flow Rate ml/min | Weight (gw) | Operation Temperature | Noise dB(A) | MTBF (hour) |
|-----------|---------------------|-------------------|-----------------------------------|----------------------|-------------|-----------------------|-------------|---------------|
| CP43A2003 | 6 ~ 13 | 12.0 | 1.8 | 1750 | 50 | 5°C ~ 65°C | 23 | 44,000at 35°C |
| CP43D2001 | 6 ~ 13 | 12.0 | 1.7 | 1650 | 50 | 5°C ~ 60°C | 25 | 30,000at 35°C |

*Noise Measurement Condition: 25 cm above Pump (Pump is filled with Pure Water)

*Model CP43D2001 is cost down solution.

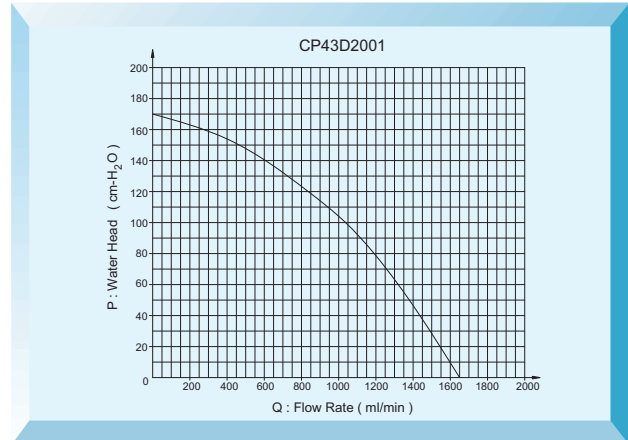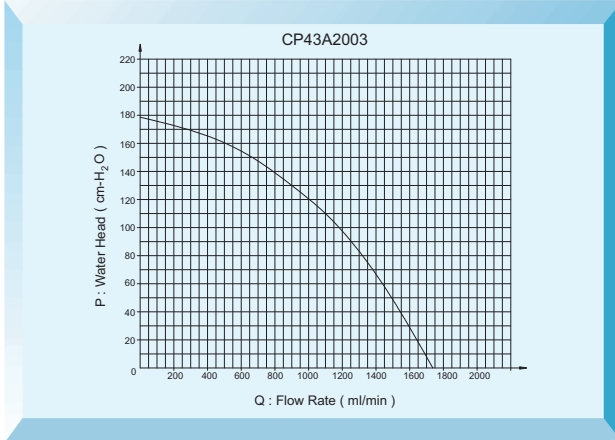

* All readings are typical values.
* Specifications are subject to change without notice.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>